


PSM - Mini Push Spacer

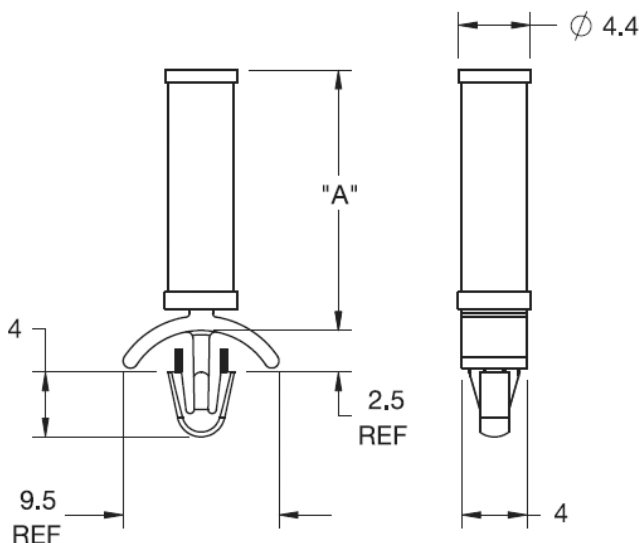

Details:

- **Material:** Nylon 6/6, UL 94 V-2, RMS-01*
- **Material:** Nylon 6/6, UL 94 V-0, RMS-19*
- **Color:** natural
- **Standard pack:** 1000 pcs

Symbol	Height A ±0.4	Bottom mounting hole dia. ±0.05	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]			
PSM-2-01	3.2	3.18	0.79 - 1.98	PA 66	UL94 V-2	natural
PSM-2-19	3.2	3.18	0.79 - 1.98	PA 66	UL94 V-0	natural
PSM-3-01	4.8	3.18	0.79 - 1.98	PA 66	UL94 V-2	natural
PSM-3-19	4.8	3.18	0.79 - 1.98	PA 66	UL94 V-0	natural
PSM-4-01	6.4	3.18	0.79 - 1.98	PA 66	UL94 V-2	natural
PSM-4-19	6.4	3.18	0.79 - 1.98	PA 66	UL94 V-0	natural
PSM-5-01	7.9	3.18	0.79 - 1.98	PA 66	UL94 V-2	natural
PSM-5-19	7.9	3.18	0.79 - 1.98	PA 66	UL94 V-0	natural
PSM-6-01	9.5	3.18	0.79 - 1.98	PA 66	UL94 V-2	natural
PSM-6-19	9.5	3.18	0.79 - 1.98	PA 66	UL94 V-0	natural
PSM-7-01	11.1	3.18	0.79 - 1.98	PA 66	UL94 V-2	natural
PSM-7-19	11.1	3.18	0.79 - 1.98	PA 66	UL94 V-0	natural
PSM-8-01	12.7	3.18	0.79 - 1.98	PA 66	UL94 V-2	natural
PSM-8-19	12.7	3.18	0.79 - 1.98	PA 66	UL94 V-0	natural
PSM-9-01	14.3	3.18	0.79 - 1.98	PA 66	UL94 V-2	natural
PSM-9-19	14.3	3.18	0.79 - 1.98	PA 66	UL94 V-0	natural
PSM-10-01	15.9	3.18	0.79 - 1.98	PA 66	UL94 V-2	natural
PSM-10-19	15.9	3.18	0.79 - 1.98	PA 66	UL94 V-0	natural