


PST - Push Spacer Teardrop

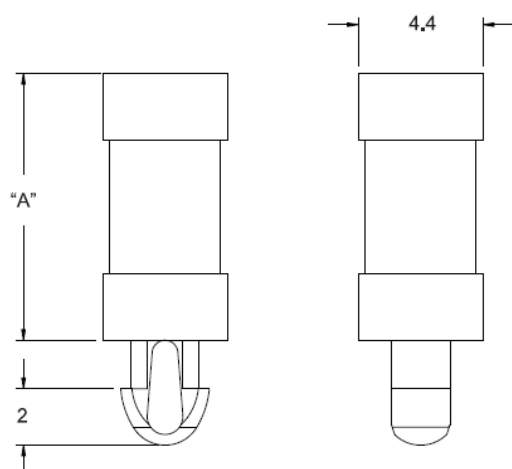

Details:

- **Material: Nylon 6/6, UL 94 V-2, RMS-01***
- **Material: Nylon 6/6, UL 94 V-0, RMS-19***
- **Color: natural**
- **Standard pack: 1000 pcs**

Symbol	Height A ±0.4	Bottom mounting hole dia. ±0.05	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]			
PST-1-01	1.6	2.54	max. 1.6	PA 66	UL94 V-2	natural
PST-1-19	1.6	2.54	max. 1.6	PA 66	UL94 V-0	natural
PST-2-01	3.2	2.54	max. 1.6	PA 66	UL94 V-2	natural
PST-2-19	3.2	2.54	max. 1.6	PA 66	UL94 V-0	natural
PST-3-01	4.8	2.54	max. 1.6	PA 66	UL94 V-2	natural
PST-3-19	4.8	2.54	max. 1.6	PA 66	UL94 V-0	natural
PST-4-01	6.4	2.54	max. 1.6	PA 66	UL94 V-2	natural
PST-4-19	6.4	2.54	max. 1.6	PA 66	UL94 V-0	natural
PST-5-01	7.9	2.54	max. 1.6	PA 66	UL94 V-2	natural
PST-5-19	7.9	2.54	max. 1.6	PA 66	UL94 V-0	natural
PST-6-01	9.5	2.54	max. 1.6	PA 66	UL94 V-2	natural
PST-6-19	9.5	2.54	max. 1.6	PA 66	UL94 V-0	natural
PST-7-01	11.1	2.54	max. 1.6	PA 66	UL94 V-2	natural
PST-7-19	11.1	2.54	max. 1.6	PA 66	UL94 V-0	natural
PST-8-01	12.7	2.54	max. 1.6	PA 66	UL94 V-2	natural
PST-8-19	12.7	2.54	max. 1.6	PA 66	UL94 V-0	natural
PST-9-01	14.3	2.54	max. 1.6	PA 66	UL94 V-2	natural
PST-9-19	14.3	2.54	max. 1.6	PA 66	UL94 V-0	natural
PST-10-01	15.9	2.54	max. 1.6	PA 66	UL94 V-2	natural
PST-10-19	15.9	2.54	max. 1.6	PA 66	UL94 V-0	natural