


## RG-HS - Heat Stabilized Cable Ties

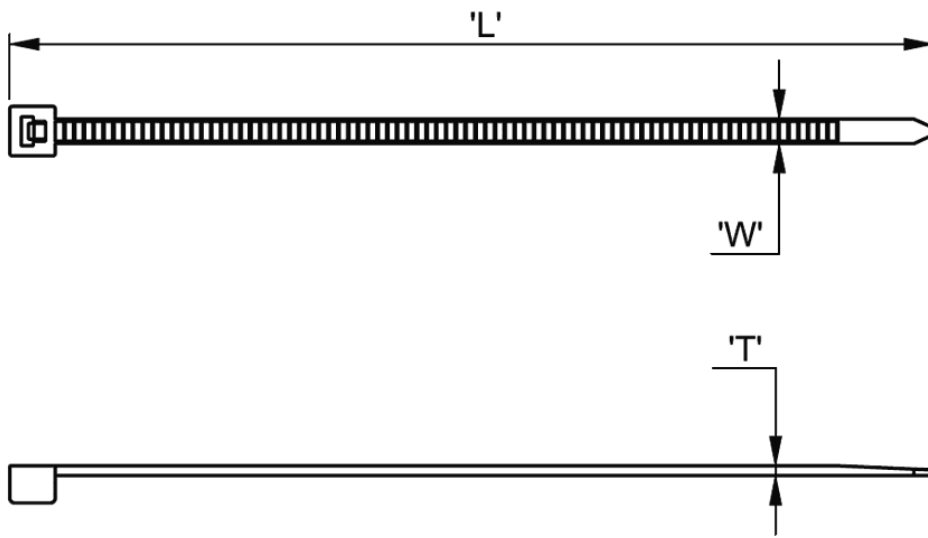

**Details:**

- **Material:** UL94 V-2 Heat Stabilized Nylon 6/6, RMS-164\*
- **Color:** natural (NAT), black (BLK)
- **Standard Pack:** 100/Bag

Symbol	Breaking force	Width W	Length L	Thickness T	Max. cable bundle diameter	Material	Flammability	Color
	[daN]	[mm]	[mm]	[mm]	[mm]			
RG-203-HS	8	2.5	98	1	21	PA 66 heat stabilized	UL94 V-2	natural
RG-303-HS	8	2.5	98	1	21	PA 66 heat stabilized	UL94 V-2	black
RG-209-HS	13	3.6	140	1.1	35	PA 66 heat stabilized	UL94 V-2	natural
RG-309-HS	13	3.6	140	1.1	35	PA 66 heat stabilized	UL94 V-2	black
RG-214-HS	13	3.6	200	1.3	50	PA 66 heat stabilized	UL94 V-2	natural
RG-314-HS	13	3.6	200	1.3	50	PA 66 heat stabilized	UL94 V-2	black
RG-215-HS	22.4	4.8	200	1.3	50	PA 66 heat stabilized	UL94 V-2	natural
RG-315-HS	22.4	4.8	200	1.3	50	PA 66 heat stabilized	UL94 V-2	black
RG-217-HS	22.4	4.8	290	1.4	79	PA 66 heat stabilized	UL94 V-2	natural
RG-317-HS	22.4	4.8	290	1.4	79	PA 66 heat stabilized	UL94 V-2	black
RG-227-HS	55	7.5	365	1.7	100	PA 66 heat stabilized	UL94 V-2	natural
RG-327-HS	55	7.5	365	1.7	100	PA 66 heat stabilized	UL94 V-2	black