


RSFS - Snap-In Card Guide

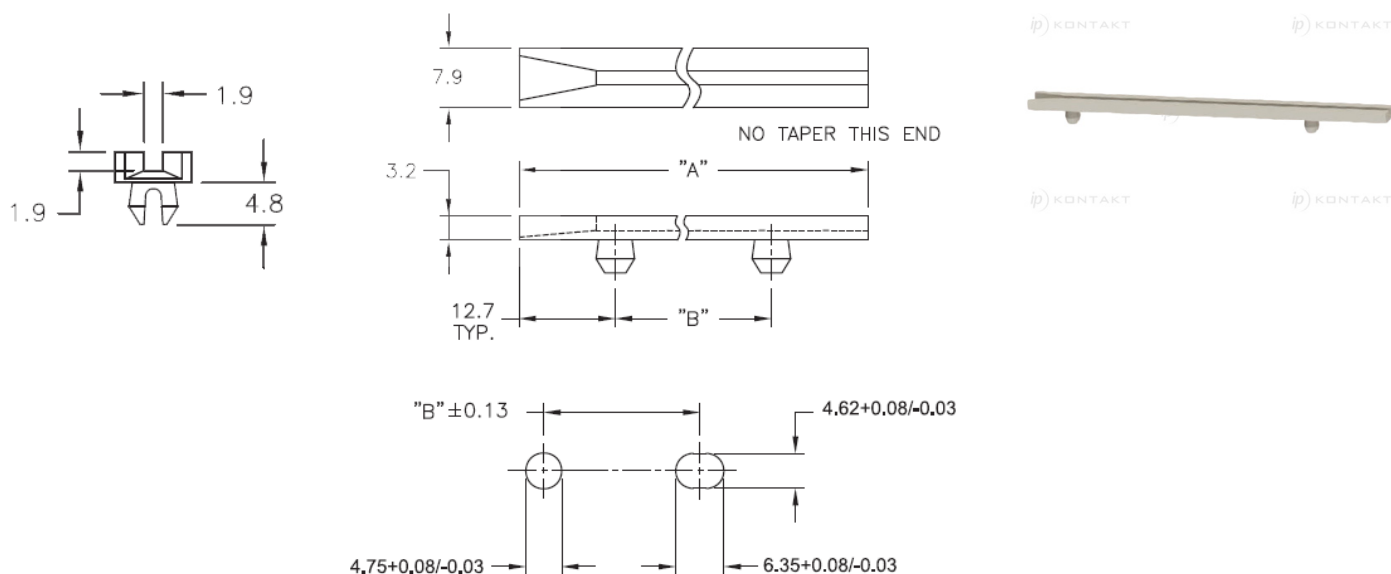

Details:

- **Nylon 6/6, UL 94 V-0, RMS-48***
- **Color: natural**
- **Minimum zakupu: 500 szt.**

Symbol	Length A	B ± 0.63	C	D	E	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
RSFS-250	63.5	38.1	3.2	1.9	4.8	PA 66	UL94 V-0	natural
RSFS-300	76.2	50.8	3.2	1.9	4.8	PA 66	UL94 V-0	natural
RSFS-350	88.9	63.5	3.2	1.9	4.8	PA 66	UL94 V-0	natural
RSFS-400	101.6	76.2	3.2	1.9	4.8	PA 66	UL94 V-0	natural
RSFS-450	114.3	76.2	3.2	1.9	4.8	PA 66	UL94 V-0	natural
RSFS-451	114.3	88.9	3.2	1.9	4.8	PA 66	UL94 V-0	natural
RSFS-500	127	101.6	3.2	1.9	4.8	PA 66	UL94 V-0	natural
RSFS-550	139.7	114.3	3.2	1.9	4.8	PA 66	UL94 V-0	natural
RSFS-600	152.4	127	3.2	1.9	4.8	PA 66	UL94 V-0	natural
RSFS-650	164.1	127.5	3.2	1.9	4.8	PA 66	UL94 V-0	natural
RSFS-651	164.1	139.7	3.2	1.9	4.8	PA 66	UL94 V-0	natural
RSFS-700	177.8	152.4	3.2	1.9	4.8	PA 66	UL94 V-0	natural
RSFS-750	190.5	165.1	3.2	1.9	4.8	PA 66	UL94 V-0	natural
RSFS-800	203.2	177.8	3.2	1.9	4.8	PA 66	UL94 V-0	natural