


RSSD - Snap-in Card Guide

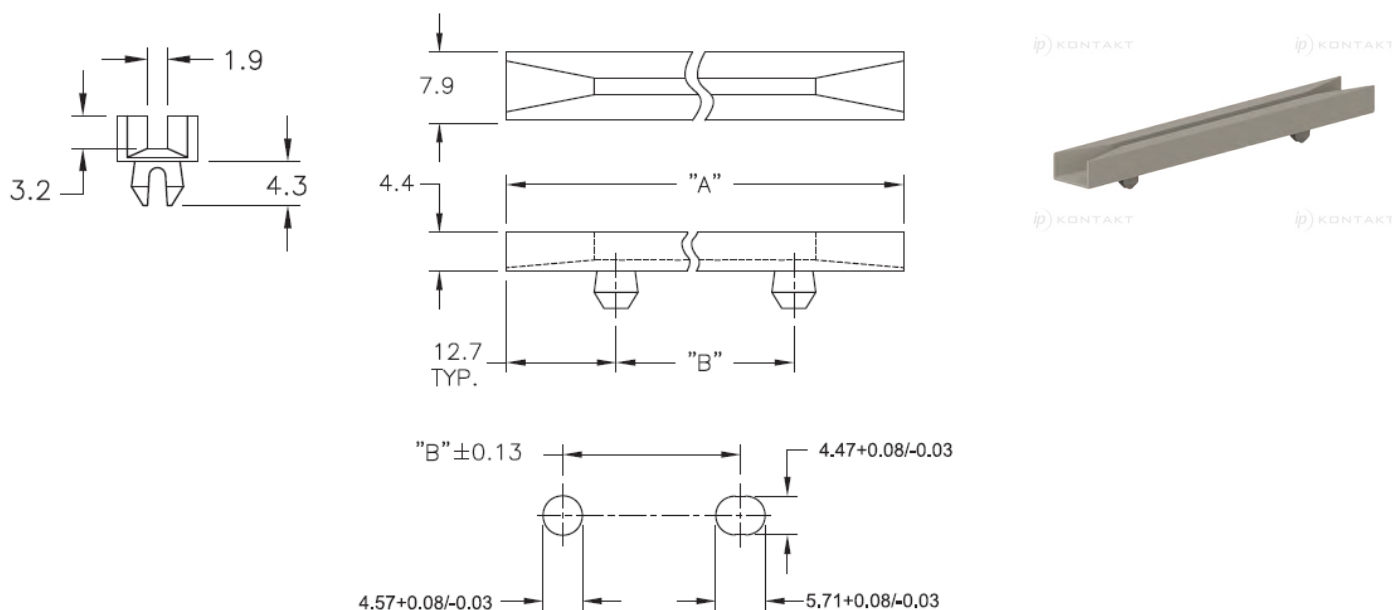

Details:

- **Material:** Nylon 6/6, UL 94 V-0, RMS-48 *
- **Color:** natural - NAT
- **Standard pack:** 500/Bag

Symbol	Length A	B ± 0.41	C	D	E	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
RSSD-250	63.5	38.1	3.2	1.9	4.3	PA 66	UL94 V-0	natural
RSSD-300	76.2	50.8	3.2	1.9	4.3	PA 66	UL94 V-0	natural
RSSD-350	88.9	63.5	3.2	1.9	4.3	PA 66	UL94 V-0	natural
RSSD-400	101.6	76.2	3.2	1.9	4.3	PA 66	UL94 V-0	natural
RSSD-450	114.3	88.9	3.2	1.9	4.3	PA 66	UL94 V-0	natural
RSSD-500	127	101.6	3.2	1.9	4.3	PA 66	UL94 V-0	natural
RSSD-550	139.7	114.3	3.2	1.9	4.3	PA 66	UL94 V-0	natural
RSSD-600	152.4	127	3.2	1.9	4.3	PA 66	UL94 V-0	natural
RSSD-650	164.1	139.7	3.2	1.9	4.3	PA 66	UL94 V-0	natural
RSSD-700	177.8	152.4	3.2	1.9	4.3	PA 66	UL94 V-0	natural
RSSD-750	190.5	165.1	3.2	1.9	4.3	PA 66	UL94 V-0	natural
RSSD-800	203.2	177.8	3.2	1.9	4.3	PA 66	UL94 V-0	natural