


SCBS - Studded Circuit Board Support

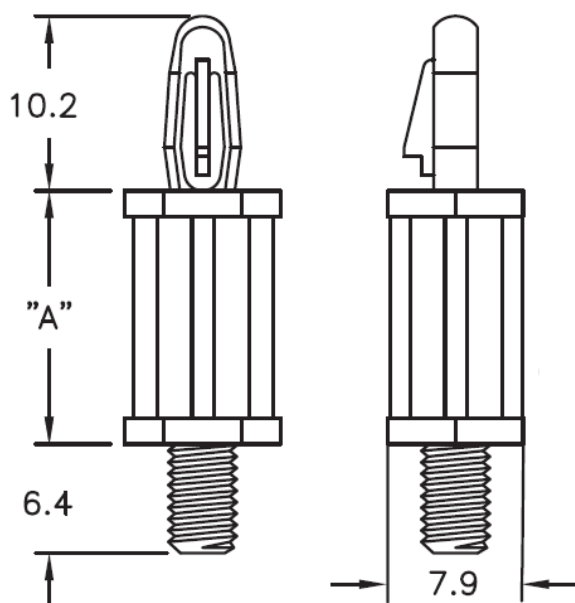

Details:

- **Material:** Nylon 6/6, UL 94 V-2, RMS-01*
- **Material:** Nylon 6/6, UL 94 V-0, RMS-19*
- **Color:** natural
- **Standard pack:** 1000 pcs

Symbol	Height A ±0.4	Ext. thread	Ext. thread length	Top mounting hole dia. ±0.08	Top panel thickness	Material	Flammability	Color
	[mm]							
SCBS-4-01	6.4	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-2	natural
SCBS-4-19	6.4	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-0	natural
SCBS-6-01	9.5	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-2	natural
SCBS-6-19	9.5	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-0	natural
SCBS-8-01	12.7	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-2	natural
SCBS-8-19	12.7	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-0	natural
SCBS-10-01	15.9	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-2	natural
SCBS-10-19	15.9	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-0	natural
SCBS-12-01	19.1	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-2	natural
SCBS-12-19	19.1	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-0	natural
SCBS-14-01	22.2	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-2	natural
SCBS-14-19	22.2	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-0	natural
SCBS-16-01	25.4	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-2	natural
SCBS-16-19	25.4	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-0	natural
SCBS-18-01	28.6	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-2	natural
SCBS-18-19	28.6	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-0	natural
SCBS-22.5-01	35.7	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-2	natural
SCBS-22.5-19	35.7	UNC 8-32	6.4	4	1.57	PA 66	UL94 V-0	natural