


SCBSM - Studded Circuit Board Support Mini

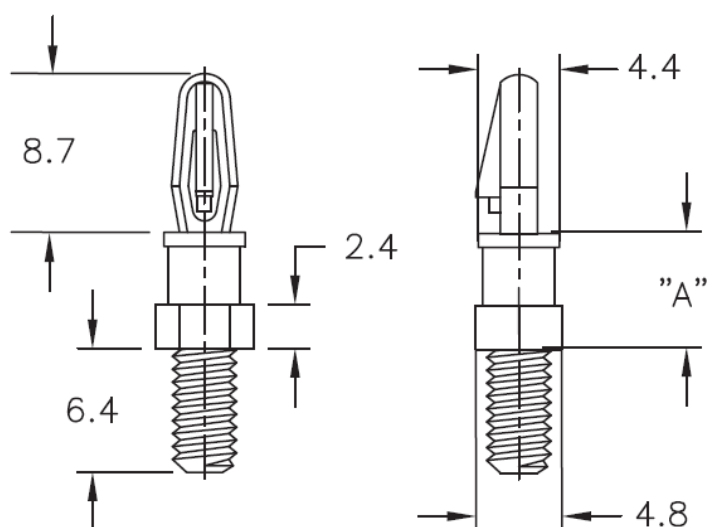

Details:

- **Material:** Nylon 6/6, UL 94 V-2, RMS-01*
- **Material:** Nylon 6/6, UL 94 V-0, RMS-19*
- **Color:** natural
- **Standard pack:** 1000 pcs

Symbol	Height A ± 0.4	Ext. thread	Ext. thread length	Top mounting hole dia. ± 0.08	Top panel thickness	Material	Flammability	Color
	[mm]							
SCBSM-632-2-01	3.2	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-2	natural
SCBSM-632-2-19	3.2	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-0	natural
SCBSM-632-3-01	4.8	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-2	natural
SCBSM-632-3-19	4.8	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-0	natural
SCBSM-632-4-01	6.4	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-2	natural
SCBSM-632-4-19	6.4	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-0	natural
SCBSM-632-5-01	7.9	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-2	natural
SCBSM-632-5-19	7.9	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-0	natural
SCBSM-632-6-01	9.5	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-2	natural
SCBSM-632-6-19	9.5	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-0	natural
SCBSM-632-7-01	11.1	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-2	natural
SCBSM-632-7-19	11.1	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-0	natural
SCBSM-632-8-01	12.7	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-2	natural
SCBSM-632-8-19	12.7	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-0	natural
SCBSM-632-9-01	14.3	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-2	natural
SCBSM-632-9-19	14.3	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-0	natural
SCBSM-632-10-01	15.9	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-2	natural
SCBSM-632-10-19	15.9	UNC 6-32	6.4	3.18	1.57	PA 66	UL94 V-0	natural