



SHK/SHKE - Stand-Off Harness Clip

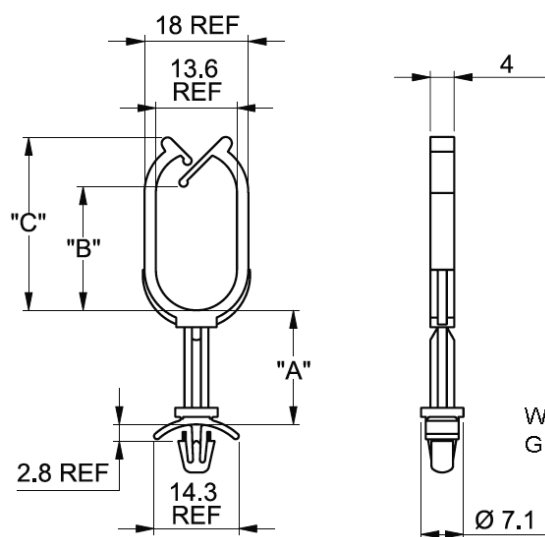

Wciskany w otwór: $\varnothing 4.8 \pm 0.08$
 Grubość panelu: 0.76 - 2.0

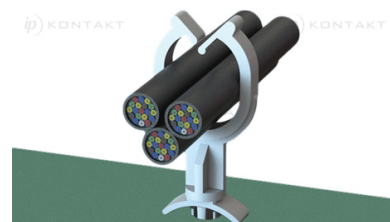

Details:

- **Material:** UL 94 V-2 Nylon 6/6, RMS-01*
- **Material:** UL 94 V-0 Nylon 6/6, RMS-19*
- **Color:** Natural
- **Standard Pack:** 1000 pcs

Symbol	A	B	C	Mounting hole diameter ± 0.08	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
SHK-6-01	9.5	13.6	19.5	4.8	0.76 - 2.0	PA 66	UL94 V-2	natural
SHK-6-19	9.5	13.6	19.5	4.8	0.76 - 2.0	PA 66	UL94 V-0	natural
SHK-8-01	12.7	13.6	19.5	4.8	0.76 - 2.0	PA 66	UL94 V-2	natural
SHK-8-19	12.7	13.6	19.5	4.8	0.76 - 2.0	PA 66	UL94 V-0	natural
SHK-12-01	19.1	13.6	19.5	4.8	0.76 - 2.0	PA 66	UL94 V-2	natural
SHK-12-19	19.1	13.6	19.5	4.8	0.76 - 2.0	PA 66	UL94 V-0	natural
SHK-16-01	25.4	13.6	19.5	4.8	0.76 - 2.0	PA 66	UL94 V-2	natural
SHK-16-19	25.4	13.6	19.5	4.8	0.76 - 2.0	PA 66	UL94 V-0	natural
SHK-20-01	31.8	13.6	19.5	4.8	0.76 - 2.0	PA 66	UL94 V-2	natural
SHK-20-19	31.8	13.6	19.5	4.8	0.76 - 2.0	PA 66	UL94 V-0	natural
SHKE-6-01	9.5	20.6	29	4.8	0.76 - 2.0	PA 66	UL94 V-2	natural
SHKE-6-19	9.5	20.6	29	4.8	0.76 - 2.0	PA 66	UL94 V-0	natural
SHKE-8-01	12.7	20.6	29	4.8	0.76 - 2.0	PA 66	UL94 V-2	natural
SHKE-8-19	12.7	20.6	29	4.8	0.76 - 2.0	PA 66	UL94 V-0	natural
SHKE-12-01	19.1	20.6	29	4.8	0.76 - 2.0	PA 66	UL94 V-2	natural
SHKE-12-19	19.1	20.6	29	4.8	0.76 - 2.0	PA 66	UL94 V-0	natural
SHKE-16-01	25.4	20.6	29	4.8	0.76 - 2.0	PA 66	UL94 V-2	natural
SHKE-16-19	25.4	20.6	29	4.8	0.76 - 2.0	PA 66	UL94 V-0	natural
SHKE-20-01	31.8	20.6	29	4.8	0.76 - 2.0	PA 66	UL94 V-2	natural
SHKE-20-19	31.8	20.6	29	4.8	0.76 - 2.0	PA 66	UL94 V-0	natural