


SKL - 45° Kurly Lock

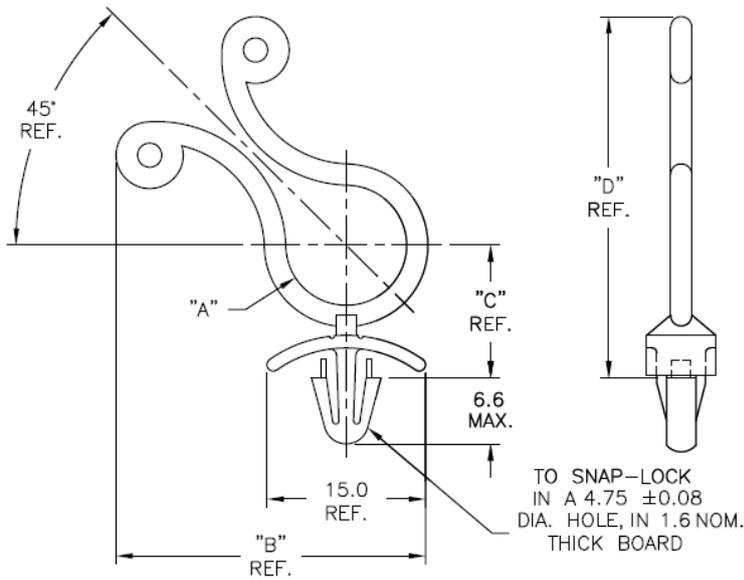

Details:

- **Material: UL94 V2 Nylon 6/6, RMS-01***
- **Material: UL94 V2 Nylon 6/6, RMS-19***
- **Color: Natural**
- Standard Pack: 1000/Bag

Symbol	Cable diameter range A	B	C	D	Mounting hole diameter ±0.08	Panel thickness	Material	Flammability	Color
	[mm]								
SKL45-250-01	3.8 - 6.4	24.9	8.4	26.7	4.75	1.6	PA 66	UL94 V-2	natural
SKL45-250-19	3.8 - 6.4	24.9	8.4	26.7	4.75	1.6	PA 66	UL94 V-0	natural
SKL45-350-01	7.6 - 10.2	27.2	10.9	30.5	4.75	1.6	PA 66	UL94 V-2	natural
SKL45-350-19	7.6 - 10.2	27.2	10.9	30.5	4.75	1.6	PA 66	UL94 V-0	natural
SKL45-450-01	10.2 - 11.9	28.4	11.9	33	4.75	1.6	PA 66	UL94 V-2	natural
SKL45-450-19	10.2 - 11.9	28.4	11.9	33	4.75	1.6	PA 66	UL94 V-0	natural