


SLCS - Stand-Off Locking Clip

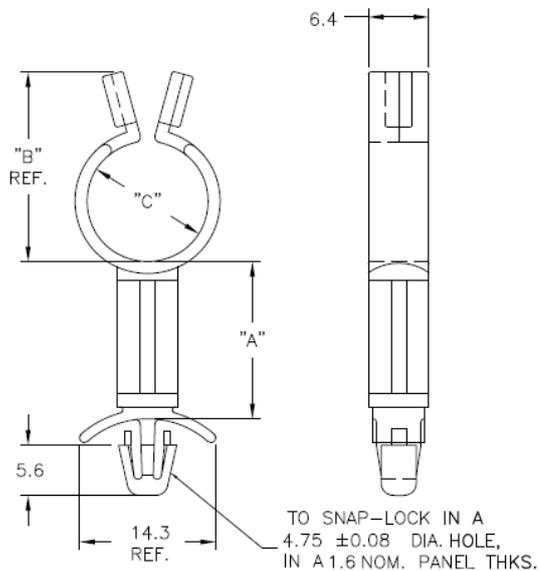

Details:

- **Material: UL94 V2 Nylon 6/6, RMS-01***
- **Material: UL94 V0 Nylon 6/6, RMS-19***
- **Color: Natural**
- Standard Pack: 1000/Bag

Symbol	A	B	Max. cable bundle diameter C	Mounting hole diameter ±0.08	Panel thickness	Material	Flammability	Color
	[mm]	[mm]						
SLCS-250-3-01	4.8	13.5	4.8	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-250-3-19	4.8	13.5	4.8	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-250-4-01	6.4	13.5	4.8	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-250-4-19	6.4	13.5	4.8	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-250-6-01	9.5	13.5	4.8	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-250-6-19	9.5	13.5	4.8	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-250-8-01	12.7	13.5	4.8	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-250-8-19	12.7	13.5	4.8	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-250-16-01	25.4	13.5	4.8	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-250-16-19	25.4	13.5	4.8	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-370-3-01	4.8	16.8	7.9	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-370-3-19	4.8	16.8	7.9	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-370-4-01	6.4	16.8	7.9	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-370-4-19	6.4	16.8	7.9	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-370-6-01	9.5	16.8	7.9	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-370-6-19	9.5	16.8	7.9	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-370-8-01	12.7	16.8	7.9	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-370-8-19	12.7	16.8	7.9	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-370-16-01	25.4	16.8	7.9	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-370-16-19	25.4	16.8	7.9	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-500-3-01	4.8	21.1	11.1	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-500-3-19	4.8	21.1	11.1	4.75	1.6	PA 66	UL94 V-0	natural

Symbol	A	B	Max. cable bundle diameter C	Mounting hole diameter ±0.08	Panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
SLCS-500-4-01	6.4	21.1	11.1	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-500-4-19	6.4	21.1	11.1	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-500-6-01	9.5	21.1	11.1	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-500-6-19	9.5	21.1	11.1	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-500-8-01	12.7	21.1	11.1	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-500-8-19	12.7	21.1	11.1	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-500-16-01	25.4	21.1	11.1	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-500-16-19	25.4	21.1	11.1	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-750-3-01	4.8	26.4	17.5	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-750-3-19	4.8	26.4	17.5	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-750-4-01	6.4	26.4	17.5	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-750-4-19	6.4	26.4	17.5	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-750-6-01	9.5	26.4	17.5	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-750-6-19	9.5	26.4	17.5	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-750-8-01	12.7	26.4	17.5	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-750-8-19	12.7	26.4	17.5	4.75	1.6	PA 66	UL94 V-0	natural
SLCS-750-16-01	25.4	26.4	17.5	4.75	1.6	PA 66	UL94 V-2	natural
SLCS-750-16-19	25.4	26.4	17.5	4.75	1.6	PA 66	UL94 V-0	natural