


SP-1 - Support Post

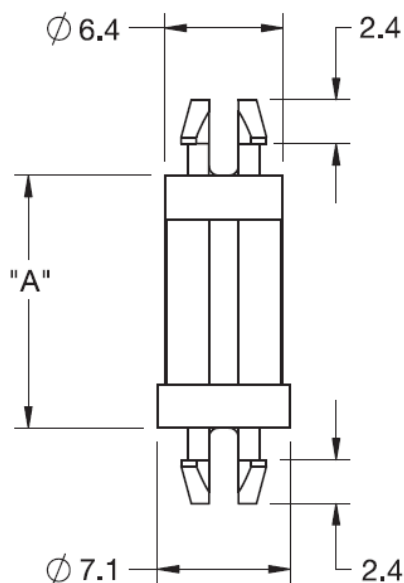

Details:

- **Material:** Nylon 6/6, UL 94 V-2, RMS-01*
- **Material:** Nylon 6/6, UL 94 V-0, RMS-19*
- **Color:** natural
- **Standard pack:** 1000 pcs

Symbol	Height A ±0.4	Top mounting hole dia. ±0.08	Top panel thickness	Bottom mounting hole dia. ±0.08	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
SP1-3-01	4.8	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP1-3-19	4.8	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP1-4-01	6.4	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP1-4-19	6.4	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP1-6-01	9.5	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP1-6-19	9.5	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP1-8-01	12.7	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP1-8-19	12.7	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP1-10-01	15.9	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP1-10-19	15.9	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP1-12-01	19.1	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP1-12-19	19.1	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP1-14-01	22.2	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP1-14-19	22.2	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP1-16-01	25.4	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP1-16-19	25.4	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural