


SP-2 - Support post

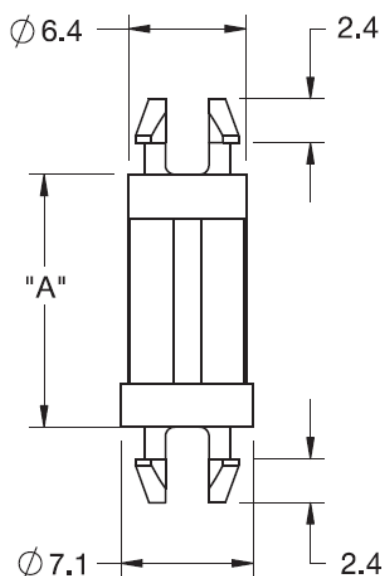

Details:

- **Material: Nylon 6/6, UL 94 V-2, RMS-01***
- **Material: Nylon 6/6, UL 94 V-0, RMS-19***
- **Color: natural**
- **Standard pack: 1000 pcs**

Symbol	Height A ±0.4	Top mounting hole dia. ±0.08	Top panel thickness	Bottom mounting hole dia. ±0.08	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
SP2-3-01	4.8	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP2-3-19	4.8	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP2-4-01	6.4	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP2-4-19	6.4	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP2-6-01	9.5	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP2-6-19	9.5	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP2-8-01	12.7	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP2-8-19	12.7	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP2-10-01	15.9	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP2-10-19	15.9	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP2-12-01	19.1	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP2-12-19	19.1	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP2-14-01	22.2	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP2-14-19	22.2	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP2-16-01	25.4	4.75	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP2-16-19	25.4	4.75	1.57	4.75	1.57	PA 66	UL94 V-0	natural