
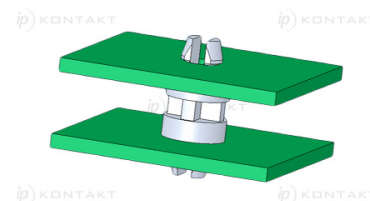


SP-3 - Support Post

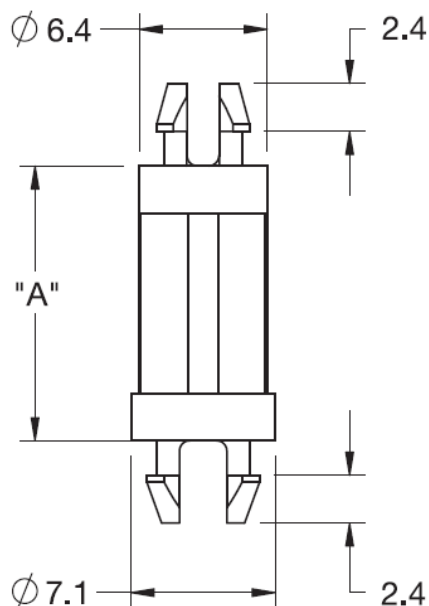

Details:

- **Material:** Nylon 6/6, UL 94 V-2, RMS-01*
- **Material:** Nylon 6/6, UL 94 V-0, RMS-19*
- **Color:** natural
- **Standard pack:** 1000 pcs

Symbol	Height A ± 0.4	Top mounting hole dia. ± 0.08	Top panel thickness	Bottom mounting hole dia. ± 0.08	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
SP3-3-01	4.8	4	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP3-3-19	4.8	4	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP3-4-01	6.4	4	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP3-4-19	6.4	4	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP3-6-01	9.5	4	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP3-6-19	9.5	4	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP3-8-01	12.7	4	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP3-8-19	12.7	4	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP3-10-01	15.9	4	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP3-10-19	15.9	4	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP3-12-01	19.1	4	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP3-12-19	19.1	4	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP3-14-01	22.2	4	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP3-14-19	22.2	4	1.57	4.75	1.57	PA 66	UL94 V-0	natural
SP3-16-01	25.4	4	1.57	4.75	1.57	PA 66	UL94 V-2	natural
SP3-16-19	25.4	4	1.57	4.75	1.57	PA 66	UL94 V-0	natural