



SRT - Snap Rivet T Type

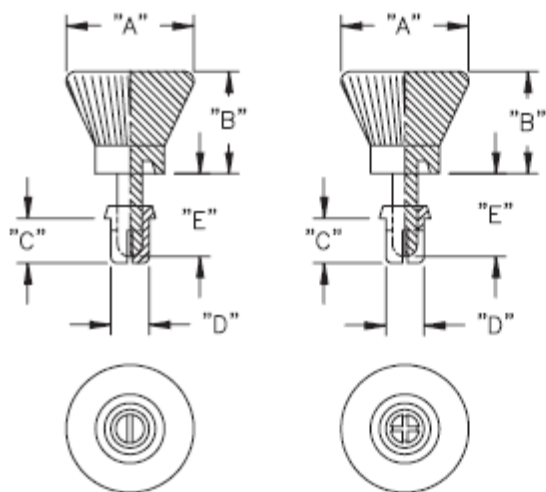

Details:

- **Material:** Nylon 6, UL 94 V-2, RMS-52 *
- **Material:** Nylon 66/6, UL 94 V-0, RMS-103 * on special order
- **Color:** black, white
- **Standard pack:** 1000 pcs

Symbol	Mounting hole diameter range G	Panel thickness range F	A	B	C	D	E	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
SRT-3035	3.1 - 3.2	1.0 - 2.0	10	8	3.5	3	6.6	PA 6	UL94 V-2	black
SRT-3045	3.1 - 3.2	2.0 - 3.0	10	8	4.5	3	6.6	PA 6	UL94 V-2	black
SRT-3055	3.1 - 3.2	3.0 - 4.0	10	8	5.5	3	6.6	PA 6	UL94 V-2	black
SRT-3065	3.1 - 3.2	4.0 - 5.0	10	8	6.5	3	9	PA 6	UL94 V-2	black
SRT-3075	3.1 - 3.2	5.0 - 6.0	10	8	7.5	3	9	PA 6	UL94 V-2	black
SRT-3080	3.1 - 3.2	5.5 - 6.5	10	8	8	3	9	PA 6	UL94 V-2	black
SRT-3535	3.6 - 3.7	1.0 - 2.0	10	8	3.5	3.5	6.6	PA 6	UL94 V-2	black
SRT-3545	3.6 - 3.7	2.0 - 3.0	10	8	4.5	3.5	6.6	PA 6	UL94 V-2	black
SRT-3555	3.6 - 3.7	3.0 - 3.7	10	8	5.5	3.5	6.6	PA 6	UL94 V-2	black
SRT-3570	3.6 - 3.7	3.8 - 5.2	10	8	7	3.5	9	PA 6	UL94 V-2	black
SRT-3580	3.6 - 3.7	5.3 - 6.5	10	8	8	3.5	9	PA 6	UL94 V-2	black
SRT-4050	4.1 - 4.2	2.5 - 3.5	12	8	5	4	7.6	PA 6	UL94 V-2	black
SRT-4060	4.1 - 4.2	3.5 - 4.5	12	8	6	4	7.6	PA 6	UL94 V-2	black
SRT-4070	4.1 - 4.2	4.5 - 5.5	12	8	7	4	11.2	PA 6	UL94 V-2	black
SRT-4080	4.1 - 4.2	5.5 - 6.5	12	8	8	4	11.2	PA 6	UL94 V-2	black
SRT-4090	4.1 - 4.2	6.5 - 7.5	12	8	9	4	11.2	PA 6	UL94 V-2	black
SRT-4100	4.1 - 4.2	7.5 - 8.5	12	8	10	4	11.2	PA 6	UL94 V-2	black