
IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

TU-FEU-M - Metal cable glands, ATEX, metric



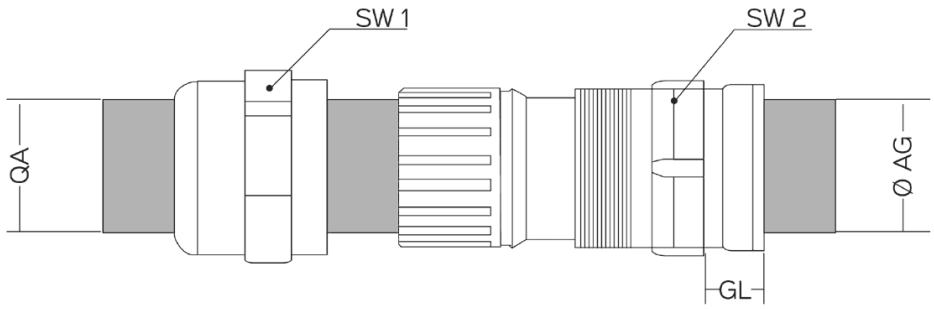

Details:

- **Body material: nickel-plated brass**
- Other available body materials: brass, stainless steel, aluminium
- **Seal material: NBR**, working temperature: -30ºC to 120ºC
- Other available seal material:
  - TPV - working temperature: -30ºC to 120ºC
  - Neoprene - working temperature: -40ºC to 100ºC
  - Silicone - temperatura pracy: -60ºC to 180ºC
- Thread: metric (EN60423)
- Certificates: IEP 17 ATEX 0516X, RoHS
- Application: Zone 1, Zone 2, Zone 21, Zone 22

Symbol	Metric thread ØAG	Cable diameter range QA	Protection D GL min.	Protection E GL min.	Wrench size SW1	Wrench size SW2	Standard pack	Material
		[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]	
TU-FEU-M12NBBN	M12×1.5	3.0 - 6.5	16	7	14	14	50	brass, nickel plated
TU-FEU-M16SNBBN	M16×1.5	4.0 - 8.0	16	7	17	18	50	brass, nickel plated
TU-FEU-M16NBBN	M16×1.5	5.0 - 10.0	16	7	20	20	50	brass, nickel plated
TU-FEU-M20SNBBN	M20×1.5	6.0 - 12.0	16	8	22	22	50	brass, nickel plated
TU-FEU-M20NBBN	M20×1.5	10.0 - 14.0	16	8	24	24	50	brass, nickel plated
TU-FEU-M25SNBBN	M25×1.5	10.0 - 14.0	16	8	24	27	25	brass, nickel plated
TU-FEU-M25NBBN	M25×1.5	13.0 - 18.0	16	8	30	30	25	brass, nickel plated
TU-FEU-M32SNBBN	M32×1.5	13.0 - 18.0	20	9	30	34	25	brass, nickel plated
TU-FEU-M32NBBN	M32×1.5	18.0 - 25.0	20	9	40	40	25	brass, nickel plated
TU-FEU-M40SNBBN	M40×1.5	18.0 - 25.0	20	9	40	43	20	brass, nickel plated

Symbol	Metric thread ØAG	Cable diameter range QA	Protection D GL min.	Protection E GL min.	Wrench size SW1	Wrench size SW2	Standard pack	Material
		[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]	
TU-FEU-M40NBBN	M40×1.5	22.0 - 32.0	20	9	50	50	20	brass, nickel plated
TU-FEU-M50SNBBN	M50×1.5	22.0 - 32.0	22	9	50	55	15	brass, nickel plated
TU-FEU-M50NBBN	M50×1.5	30.0 - 38.0	22	9	58	58	15	brass, nickel plated
TU-FEU-M63SNBBN	M63×1.5	30.0 - 38.0	24	14	58	68	12	brass, nickel plated
TU-FEU-M63NBBN	M63×1.5	34.0 - 44.0	24	14	64	68	12	brass, nickel plated
TU-FEU-M63LNBBN	M63×1.5	37.0 - 53.0	24	14	77	74	10	brass, nickel plated
TU-FEU-M72NBBN	M72×2.0	37.0 - 53.0	24	16	77	74	4	brass, nickel plated
TU-FEU-M75NBBN	M75×2.0	56.0 - 63.0	26	16	77	77	4	brass, nickel plated
TU-FEU-M80NBBN	M80×2.0	60.0 - 66.0	26	18	90	90	2	brass, nickel plated