
IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

TU-FEU-N -



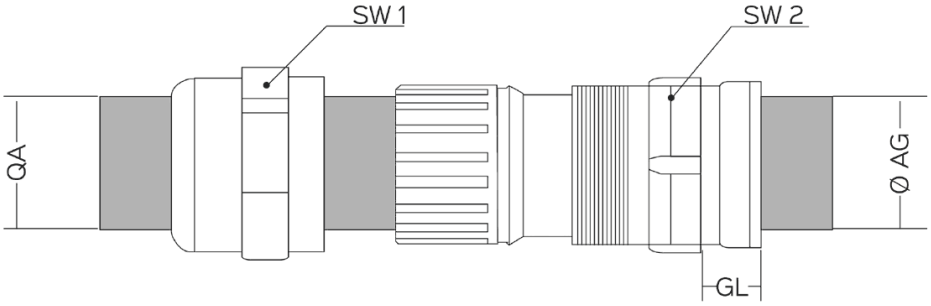

Details:

- **Body material: nickel-plated brass**
- Other available body materials: brass, stainless steel, aluminium
- **Seal material: NBR**, working temperature: -30ºC to 120ºC
- Other available seal material:
  - TPV - working temperature: -30ºC to 120ºC
  - Neoprene - working temperature: -40ºC to 100ºC
  - Silicone - temperatura pracy: -60ºC to 180ºC
- Thread: NPT (ASME B 1.20.1)
- Certificates: IEP 17 ATEX 0516X, RoHS
- Application: Zone 1, Zone 2, Zone 21, Zone 22

Symbol	NPT Thread ØAG	Cable diameter range QA	Protection D GL min.	Protection E GL min.	Wrench size SW1	Wrench size SW2	Standard pack	Material
	[in]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]	
TU-FEU-N14NBBN	1/4	3.0 - 6.5	16	7	14	14	50	brass, nickel plated
TU-FEU-N38SNBBN	3/8	4.0 - 8.0	16	7	17	18	50	brass, nickel plated
TU-FEU-N38NBBN	3/8	5.0 - 10.0	16	7	20	20	50	brass, nickel plated
TU-FEU-N12SNBBN	1/2	6.0 - 12.0	16	8	22	22	50	brass, nickel plated
TU-FEU-N12NBBN	1/2	10.0 - 14.0	16	8	24	24	50	brass, nickel plated
TU-FEU-N34SNBBN	3/4	10.0 - 14.0	16	8	27	27	25	brass, nickel plated
TU-FEU-N34NBBN	3/4	13.0 - 18.0	16	8	30	30	25	brass, nickel plated
TU-FEU-N1SNBBN	1	13.0 - 18.0	20	9	30	34	25	brass, nickel plated
TU-FEU-N1NBBN	1	18.0 - 25.0	20	9	40	40	25	brass, nickel plated
TU-FEU-N114SNBBN	1.1/4	18.0 - 25.0	20	9	40	43	20	brass, nickel plated
TU-FEU-N114NBBN	1.1/4	22.0 - 32.0	20	9	50	50	20	brass, nickel plated
TU-FEU-N112SNBBN	1.1/2	22.0 - 32.0	22	9	50	55	15	brass, nickel plated
TU-FEU-N112NBBN	1.1/2	30.0 - 38.0	22	9	58	58	15	brass, nickel plated
TU-FEU-N2SNBBN	2	30.0 - 38.0	24	14	58	68	12	brass, nickel plated
TU-FEU-N2NBBN	2	34.0 - 44.0	24	14	64	68	12	brass, nickel plated
TU-FEU-N2LNBBN	2	37.0 - 53.0	24	14	77	74	10	brass, nickel plated
TU-FEU-N212SNBBN	2.1/2	37.0 - 53.0	24	16	77	74	4	brass, nickel plated

Symbol	NPT Thread ØAG	Cable diameter range QA	Protection D GL min.	Protection E GL min.	Wrench size SW1	Wrench size SW2	Standard pack	Material
	[in]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]	
TU-FEU-N212NBBN	2.1/2	56.0 - 63.0	25	16	77	77	4	brass, nickel plated
TU-FEU-N3NBBN	3	60.0 - 66.0	26	18	90	90	2	brass, nickel plated