



WCC - Webbed Centring Clip

Rys. 1

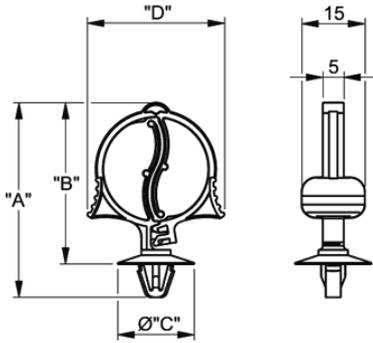

Rys. 2

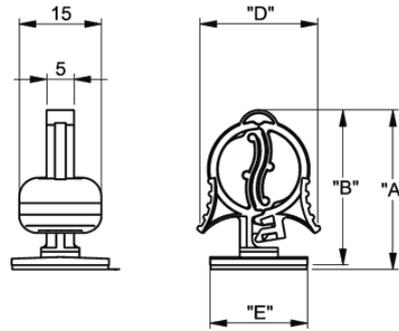

Details:

- **Material:** Nylon 66 RMS-01* or Nylon 66 UV Stabilized RMS-46*
- **Flammability:** UL94 V-2
- **Color:** see table
- **Standard pack:** see table

Symbol	Fig.	A	B	C	D	E	Panel thickness range	Mounting hole diameter range	Cable diameter range	Notes	Standard pack	Material	Flammability	Color
		[mm]	[mm]	[mm]	[mm]	[mm]								
WCC1-1-01	1	35	28	18.4	23	17.8	0.5 - 1.6	4.0 - 4.8	3.0 - 7.9	-	500	PA 66	UL94 V-2	natural
WCC1-2-01	1	40	31	18.4	27	17.8	0.5 - 1.6	4.0 - 4.8	3.0 - 9.5	-	500	PA 66	UL94 V-2	natural
WCC1-3-01	1	45	37	18.4	33	17.8	0.5 - 1.6	4.0 - 4.8	3.0 - 12.7	-	500	PA 66	UL94 V-2	natural
WCC2-1-01	1	32	28	16	23	17.8	0.5 - 2.5	6.0 - 6.8	3.0 - 7.9	-	500	PA 66	UL94 V-2	natural
WCC2-2-01	1	37	31	16	27	17.8	0.5 - 2.5	6.0 - 6.8	3.0 - 9.5	-	500	PA 66	UL94 V-2	natural
WCC2-3-01	1	42	37	16	33	17.8	0.5 - 2.5	6.0 - 6.8	3.0 - 12.7	-	500	PA 66	UL94 V-2	natural
WCC3-1-01A4-RT	2	28	27	-	23	17.8	-	-	3.0 - 7.9	double-sided adhesive tape 0.8 mm RMS-324	500	PA 66	UL94 V-2	natural
WCC3-2-01A4-RT	2	32	31	-	37	17.8	-	-	3.0 - 9.5	double-sided adhesive tape 0.8 mm RMS-324	1000	PA 66	UL94 V-2	natural
WCC3-3-01A4-RT	2	38	37	-	33	25.4	-	-	3.0 - 12.7	double-sided adhesive tape 0.8 mm RMS-324	1000	PA 66	UL94 V-2	natural
WCC1-1-UVB	1	35	28	18.4	23	17.8	0.5 - 1.6	4.0 - 4.8	3.0 - 7.9	-	500	PA 66 UV stabilized	UL94 V-2	black
WCC1-2-UVB	1	40	31	18.4	27	17.8	0.5 - 1.6	4.0 - 4.8	3.0 - 9.5	-	500	PA 66 UV stabilized	UL94 V-2	black
WCC1-3-UVB	1	45	37	18.4	33	17.8	0.5 - 1.6	4.0 - 4.8	3.0 - 12.7	-	500	PA 66 UV stabilized	UL94 V-2	black
WCC2-1-UVB	1	32	28	16	23	17.8	0.5 - 2.5	6.0 - 6.8	3.0 - 7.9	-	500	PA 66 UV stabilized	UL94 V-2	black
WCC2-2-UVB	1	37	31	16	27	17.8	0.5 - 2.5	6.0 - 6.8	3.0 - 9.5	-	500	PA 66 UV stabilized	UL94 V-2	black

Symbol	Fig.	A	B	C	D	E	Panel thickness range	Mounting hole diameter range	Cable diameter range	Notes	Standard pack	Material	Flammability	Color
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[szt./pcs]			
WCC2-3-UVB	1	42	37	16	33	17.8	0.5 - 2.5	6.0 - 6.8	3.0 - 12.7	-	500	PA 66 UV stabilized	UL94 V-2	black