


## WIT-50RLA - Push-Mount Ties

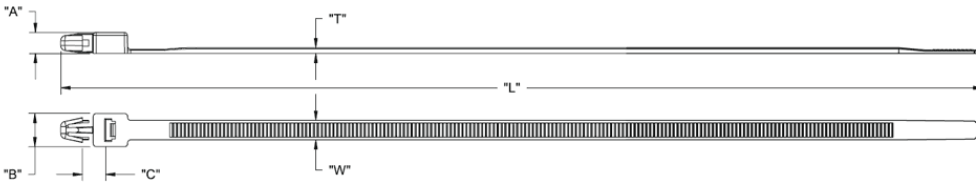

### Details:

- **UL94 V-2 Nylon 6/6, RMS-01\***
- **Material: UVB Nylon 6/6, UL 94 V-2, RMS-46\* (on special order only)**
- **Color: Natural**
- **Standard Pack: 1000/Bag**

Symbol	Tensile strength	Width W	Length L	Thickness T	Max. cable bundle diameter	A	B	C	Mounting hole diameter $\pm 0.08$	Panel thickness	Material	Flammability	Color
	[daN]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
WIT-50RLA-M	22.4	4.8	225.4	1.3	50.8	5.1	8.1	5.4	4.8	2.4	PA 66	UL94 V-2	natural
WIT-50RLA-1	22.4	4.8	135	1.3	25.4	6.5	8.1	6	6.35	3.2	PA 66	UL94 V-2	natural
WIT-50RLA-2	22.4	4.8	170	1.3	38.1	6.5	8.1	6	6.35	3.2	PA 66	UL94 V-2	natural
WIT-50RLA-3	22.4	4.8	200	1.3	44.5	6.5	8.1	6	6.35	3.2	PA 66	UL94 V-2	natural