
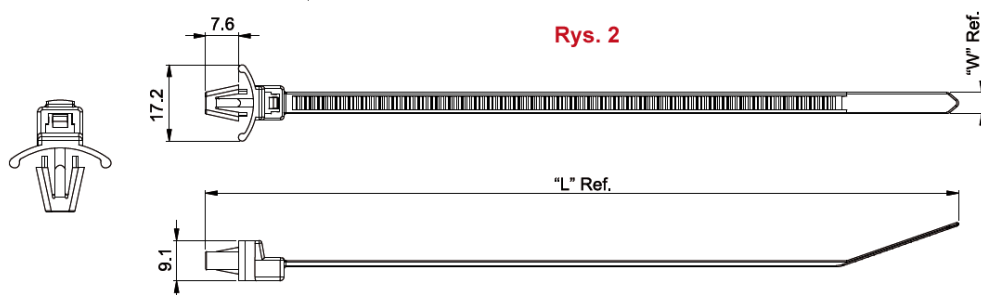


WIT-RA/SA - Arrowhead Ties

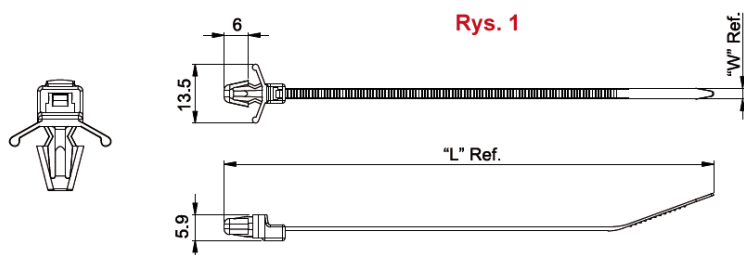

Details:

- **Nylon 6/6, UL94 V-2, RMS-01 ***
- **UVB Nylon 6/6, UL94 V-2, RMS-46 ***
- **Color:** NAT - natural, BK - black

Symbol	Fig.	Tensile strength	Length L	Max. cable bundle diameter	Width W	Mounting hole diameter range	Panel thickness range	Standard pack	MoQ [pcs]	Material	Flammability	Color
		[daN]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]				
WIT-18RA-01	1	8	109	21	2.5	4.8	1.6	1000	-	PA 66	UL94 V-2	natural
WIT-18RA-01-BK	1	8	109	21	2.5	4.8	1.6	1000	50000	PA 66	UL94 V-2	black
WIT-18RA-01-UVB	1	8	109	21	2.5	4.8	1.6	1000	50000	PA 66 UVB	UL94 V-2	black
WIT-50SA-01	1	22	133	23	4.8	6.4	1.6	1000	-	PA 66	UL94 V-2	natural
WIT-50SA-V0	1	22	133	23	4.8	6.4	1.6	1000	50000	PA 66	UL94 V-0	natural
WIT-50SA-01-BK	1	22	133	23	4.8	6.4	1.6	1000	50000	PA 66	UL94 V-2	black
WIT-50SA-01-HT	1	22	133	23	4.8	6.4	1.6	1000	50000	PA 46	UL94 V-2	natural
WIT-50SA-01-UVB	1	22	133	23	4.8	6.4	1.6	1000	50000	PA 66 UVB	UL94 V-2	black
WIT-50SRA-01	1	22	173	36	4.8	6.4	1.6	1000	-	PA 66	UL94 V-2	natural
WIT-50SRA-V0	1	22	173	36	4.8	6.4	1.6	1000	50000	PA 66	UL94 V-0	natural
WIT-50SRA-01-BK	1	22	173	36	4.8	6.4	1.6	1000	50000	PA 66	UL94 V-2	black
WIT-50SRA-01-HT	1	22	173	36	4.8	6.4	1.6	1000	50000	PA 46	UL94 V-2	natural
WIT-50SRA-01-UVB	1	22	173	36	4.8	6.4	1.6	1000	50000	PA 66 UVB	UL94 V-2	black
WIT-50RA-01	1	22	198	43	4.8	6.4	1.6	500	-	PA 66	UL94 V-2	natural
WIT-50RA-V0	1	22	198	43	4.8	6.4	1.6	500	50000	PA 66	UL94 V-0	natural
WIT-50RA-01-BK	1	22	198	43	4.8	6.4	1.6	500	50000	PA 66	UL94 V-2	black
WIT-50RA-01-HT	1	22	198	43	4.8	6.4	1.6	500	50000	PA 46	UL94 V-2	natural
WIT-50RA-01-UVB	1	22	198	43	4.8	6.4	1.6	500	50000	PA 66 UVB	UL94 V-2	black
WIT-50SA-1-01	2	22	133	23	4.8	6.4 - 6.8	0.8 - 2.0	1000	-	PA 66	UL94 V-2	natural
WIT-50SA-1-V0	2	22	133	23	4.8	6.4 - 6.8	0.8 - 2.0	1000	50000	PA 66	UL94 V-0	natural
WIT-50SA-1-01-BK	2	22	133	23	4.8	6.4 - 6.8	0.8 - 2.0	1000	50000	PA 66	UL94 V-2	black
WIT-50SA-1-01-HT	2	22	133	23	4.8	6.4 - 6.8	0.8 - 2.0	1000	50000	PA 46	UL94 V-2	natural

Symbol	Fig.	Tensile strength	Length L	Max. cable bundle diameter	Width W	Mounting hole diameter range	Panel thickness range	Standard pack	MoQ [pcs]	Material	Flammability	Color
		[daN]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]				
WIT-50SA-1-01-UVB	2	22	133	23	4.8	6.4 - 6.8	0.8 - 2.0	1000	50000	PA 66 UVB	UL94 V-2	black
WIT-50SRA-1-01	2	22	173	36	4.8	6.4 - 6.8	0.8 - 2.0	1000	-	PA 66	UL94 V-2	natural
WIT-50SRA-1-V0	2	22	173	36	4.8	6.4 - 6.8	0.8 - 2.0	1000	50000	PA 66	UL94 V-0	natural
WIT-50SRA-1-01-BK	2	22	173	36	4.8	6.4 - 6.8	0.8 - 2.0	1000	50000	PA 66	UL94 V-2	black
WIT-50SRA-1-01-HT	2	22	173	36	4.8	6.4 - 6.8	0.8 - 2.0	1000	50000	PA 46	UL94 V-2	natural
WIT-50SRA-1-01-UVB	2	22	173	36	4.8	6.4 - 6.8	0.8 - 2.0	1000	50000	PA 66 UVB	UL94 V-2	black
WIT-50RA-1-01	2	22	198	43	4.8	6.4 - 6.8	0.8 - 2.0	500	-	PA 66	UL94 V-2	natural
WIT-50RA-1-V0	2	22	198	43	4.8	6.4 - 6.8	0.8 - 2.0	500	50000	PA 66	UL94 V-0	natural
WIT-50RA-1-01-BK	2	22	198	43	4.8	6.4 - 6.8	0.8 - 2.0	500	50000	PA 66	UL94 V-2	black
WIT-50RA-1-01-HT	2	22	198	43	4.8	6.4 - 6.8	0.8 - 2.0	500	50000	PA 46	UL94 V-2	natural
WIT-50RA-1-01-UVB	2	22	198	43	4.8	6.4 - 6.8	0.8 - 2.0	500	50000	PA 66 UVB	UL94 V-2	black