


WL-LH - Adhesive cable holders

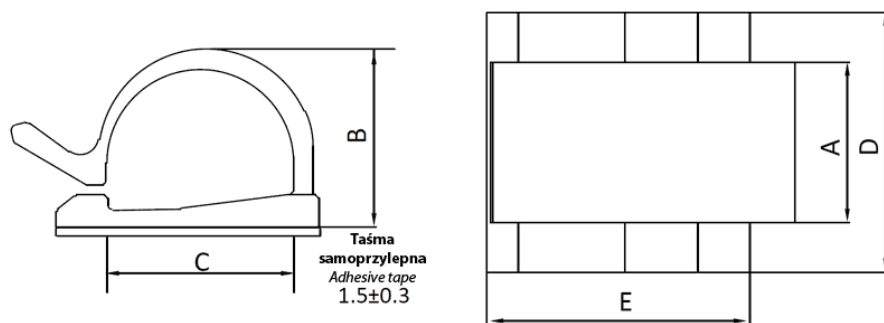

Details:

- **Material: PA 6.6/6 + adhesive tape**
- **Colour: natural or black (more resistant to UV)**
- Raw material flammability UL94 V-2
- Humidity absorption: 2,7% - 2,8% (23°C - 50% R.H.)
- Installation temperature (with adhesive): -10°C to +85°C
- Installation temperature (without adhesive): -25°C to +85°C
- Working temperature: -40°C to +85°C
- Good resistance to bases, oils, greases, oil derivatives, chloride solvents. Limited resistance to acids. Not resistant to phenols.
- It is recommended that adhesive mounts to be stuck 2 hours prior to loading. Adhesive tape is the best choice for most adhesive mount applications, including powder coated surfaces.

Symbol	A	B	C	D	E	Max. cable bundle diameter	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
WL-LH-12-1/4-BLK	9.5	7.8	6	18.5	18.5	5	PA 66	UL94 V-2	black
WL-LH-12-1/4-NAT	9.5	7.8	6	18.5	18.5	5	PA 66	UL94 V-2	natural
WL-LH-12-1/2-BLK	12	11.5	11.9	26	26	8	PA 66	UL94 V-2	black
WL-LH-12-1/2-NAT	12	11.5	11.9	26	26	8	PA 66	UL94 V-2	natural
WL-LH-12-3/4-BLK	15.4	17.1	18.1	25	25	16	PA 66	UL94 V-2	black
WL-LH-12-3/4-NAT	15.4	17.1	18.1	25	25	16	PA 66	UL94 V-2	natural