


WS-A - Wire Saddle, Arrowhead Mount

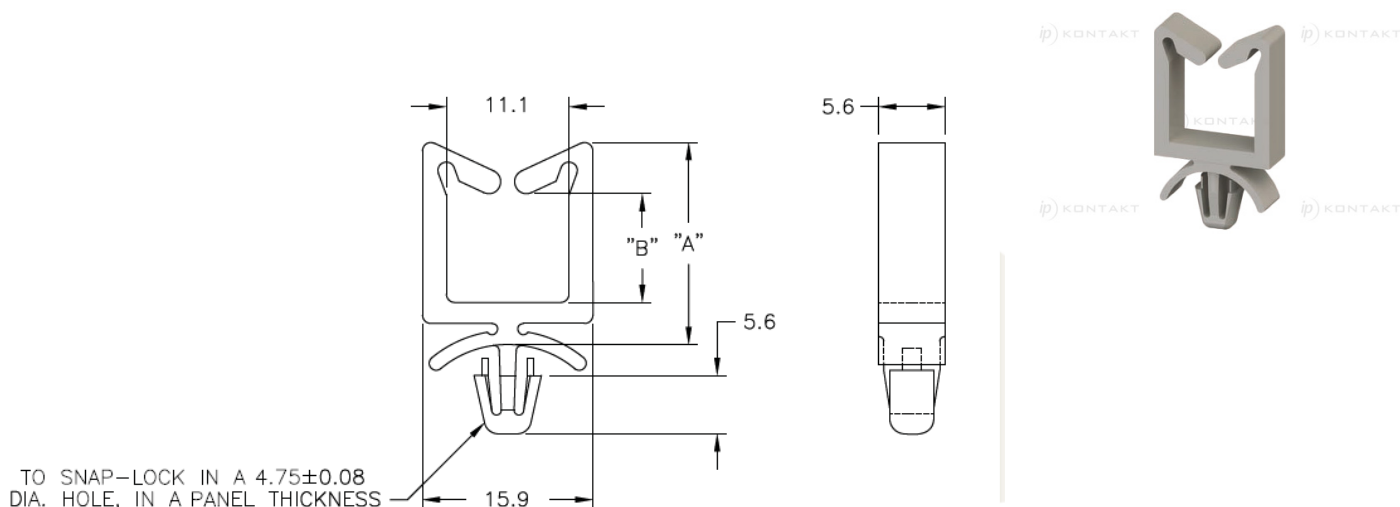

Details:

- **Material:** Nylon 6/6, UL 94 V-2, RMS-01* or Nylon 6/6, UL 94 V-0, RMS-19*
- **Color:** natural
- Mounting hole: 4.75 mm
- Standard pack: 1000 pcs

Symbol	A	B	Panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]			
WS-A-1-01	13	4.8	1.6	PA 66	UL94 V-2	natural
WS-A-1-19	13	4.8	1.6	PA 66	UL94 V-0	natural
WS-A-2-1-01	13	4.8	3.2	PA 66	UL94 V-2	natural
WS-A-2-1-19	13	4.8	3.2	PA 66	UL94 V-0	natural
WS-A-2-01	18	9.9	1.6	PA 66	UL94 V-2	natural
WS-A-2-19	18	9.9	1.6	PA 66	UL94 V-0	natural
WS-A-2-2-01	18	9.9	3.2	PA 66	UL94 V-2	natural
WS-A-2-2-19	18	9.9	3.2	PA 66	UL94 V-0	natural
WS-A-3-01	26.9	19.1	1.6	PA 66	UL94 V-2	natural
WS-A-3-19	26.9	19.1	1.6	PA 66	UL94 V-0	natural
WS-A-2-3-01	26.9	19.1	3.2	PA 66	UL94 V-2	natural
WS-A-2-3-19	26.9	19.1	3.2	PA 66	UL94 V-0	natural
WS-A-4-01	34.8	27.2	1.6	PA 66	UL94 V-2	natural
WS-A-4-19	34.8	27.2	1.6	PA 66	UL94 V-0	natural
WS-A-2-4-01	34.8	27.2	3.2	PA 66	UL94 V-2	natural
WS-A-2-4-19	34.8	27.2	3.2	PA 66	UL94 V-0	natural