


WS-SE1 - Wire Saddle, Side Entry

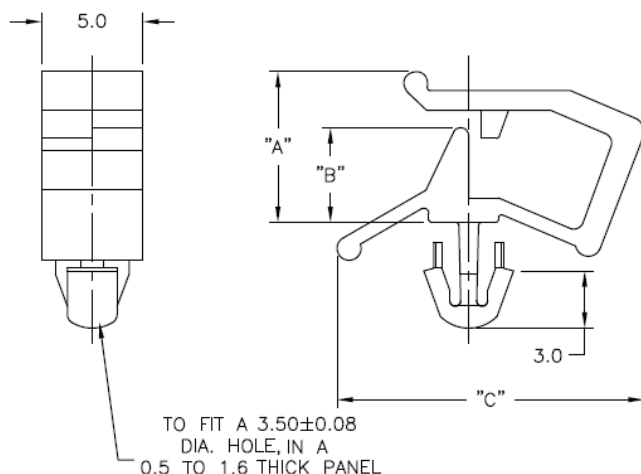

Details:

- **Nylon 6/6, UL 94 V-2, RMS-01 ***
- **Nylon 6/6, UL 94 V-0, RMS-19 ***
- **Color:** natural
- **Standard pack:** 1000/Bag

Symbol	A	B	C	Mounting hole diameter ±0.08	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
WS-SE1-1-01	4.8	2.3	12.7	3.5	0.5 - 1.6	PA 66	UL94 V-2	natural
WS-SE1-1-19	4.8	2.3	12.7	3.5	0.5 - 1.6	PA 66	UL94 V-0	natural
WS-SE1-2-01	6.6	4.1	15	3.5	0.5 - 1.6	PA 66	UL94 V-2	natural
WS-SE1-2-19	6.6	4.1	15	3.5	0.5 - 1.6	PA 66	UL94 V-0	natural
WS-SE1-3-01	8.6	5.8	20.6	3.5	0.5 - 1.6	PA 66	UL94 V-2	natural
WS-SE1-3-19	8.6	5.8	20.6	3.5	0.5 - 1.6	PA 66	UL94 V-0	natural