


WSBH - Wire Saddle with Blind Hole Mount

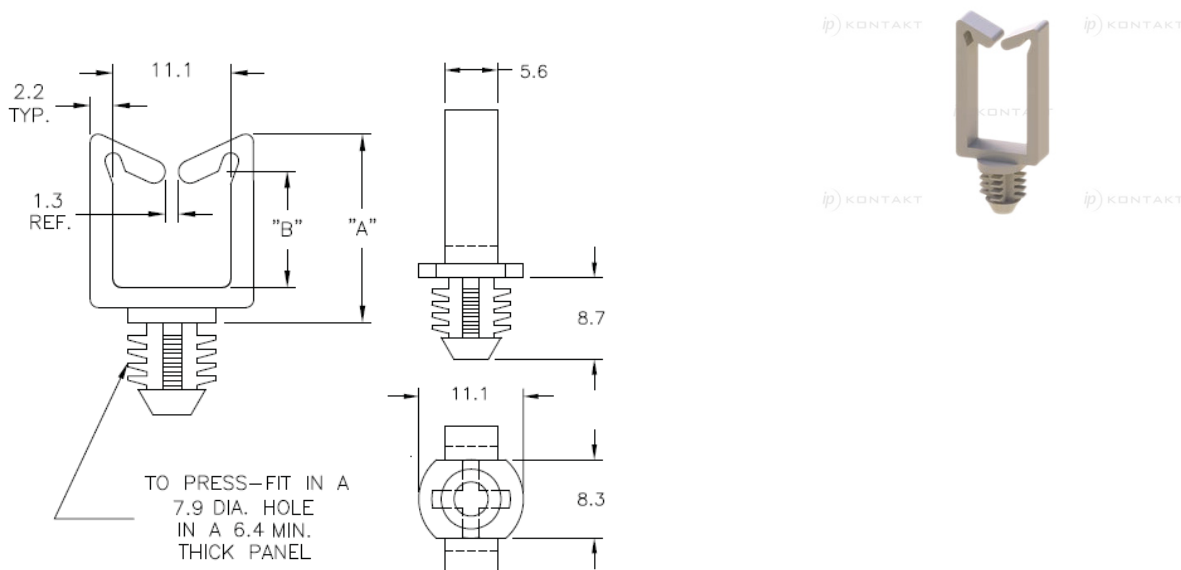

Details:

- **Material: Nylon 6/6, UL 94 V-2, RMS-01 * or Nylon 6/6, UL 94 V-0, RMS-19 ***
- Color: natural
- Mounting hole: 7.9 mm
- Panel thickness: 6.4 mm
- Standard pack: 1000/Back

Symbol	A	B	Mounting hole diameter	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
WSBH-1-01	13	3.6	7.9	6.4 min.	PA 66	UL94 V-2	natural
WSBH-1-19	13	3.6	7.9	6.4 min.	PA 66	UL94 V-0	natural
WSBH-2-01	18.3	8.6	7.9	6.4 min.	PA 66	UL94 V-2	natural
WSBH-2-19	18.3	8.6	7.9	6.4 min.	PA 66	UL94 V-0	natural
WSBH-3-01	27.2	17.8	7.9	6.4 min.	PA 66	UL94 V-2	natural
WSBH-3-19	27.2	17.8	7.9	6.4 min.	PA 66	UL94 V-0	natural
WSBH-4-01	35.6	25.9	7.9	6.4 min.	PA 66	UL94 V-2	natural
WSBH-4-19	35.6	25.9	7.9	6.4 min.	PA 66	UL94 V-0	natural