






WSLTB - Wire Saddle Locking Top on Base



Montaż w otworze Ø3.2
 nit z serii SR-3000 lub śruba #4 (M3)

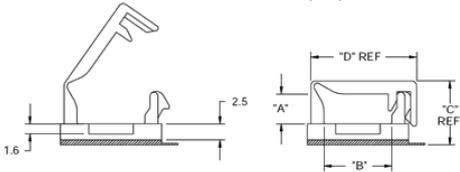

Rys. 2

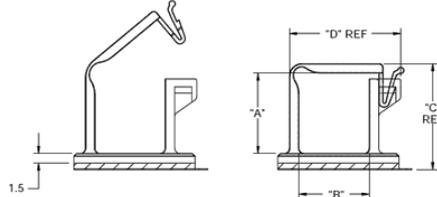

Details:

- **Material: UL94 V0 Nylon, 6/6, RMS-19***
- **Adhesive back, RMS-15***
- **Color: Natural**
- **Standard Pack: 1000/Bag**

Symbol	Fig.	A	B	C	D	E	F	Mounting	Material	Flammability	Color
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]				
WSLTB-01A-19A	1	4.8	10.7	10.4	16.8	16	12.7	Acrylic Adhesive. RMS-15*	PA 66	UL94 V-0	natural
WSLTB-01A-19	1	4.8	10.7	9.6	16.8	16	12.7	Any *SR-3XXX rivet or #4 or M3 screw	PA 66	UL94 V-0	natural
WSLTB-02A-19A	1	10	16.3	15.5	22.4	21.5	12.7	Acrylic Adhesive. RMS-15*	PA 66	UL94 V-0	natural
WSLTB-02A-19	1	10	16.3	14.7	22.4	21.5	12.7	Any *SR-3XXX rivet or #4 or M3 screw	PA 66	UL94 V-0	natural
WSLTB-03A-19A	2	12.7	11	16.8	17.5	19	12	Acrylic Adhesive. RMS-15*	PA 66	UL94 V-0	natural