


WTLH - Webbed Twist Lock, Hinged

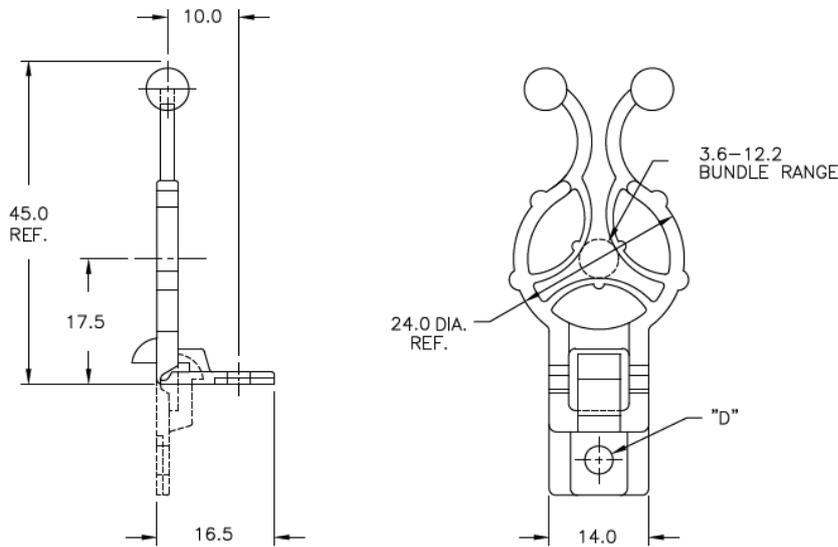

Details:

- Nylon 6/6, UL 94 V-2, RMS-01*
- Nylon 6/6, UL 94 V-0, RMS-19*
- Color: natural
- Standard pack: 500/Bag

Symbol	Mounting hole diameter D	Cable diameter range	Notes	Material	Flammability	Color
	[mm]	[mm]				
WTLH90-300-4-01	3.3	3.6 - 12.2	Mount with screw: #4 or M3	PA 66	UL94 V-2	natural
WTLH-300-4-19	3.3	3.6 - 12.2	Mount with screw: #4 or M3	PA 66	UL94 V-0	natural
WTLH90-300-6-01	3.8	3.6 - 12.2	Mount with screw: #6 or M3	PA 66	UL94 V-2	natural
WTLH-300-6-19	3.8	3.6 - 12.2	Mount with screw: #6 or M3	PA 66	UL94 V-0	natural
WTLH90-300-M4-01	4.3	3.6 - 12.2	Mount with screw: #8 or M4	PA 66	UL94 V-2	natural
WTLH-90-300-M4-19	4.3	3.6 - 12.2	Mount with screw: #8 or M4	PA 66	UL94 V-0	natural