
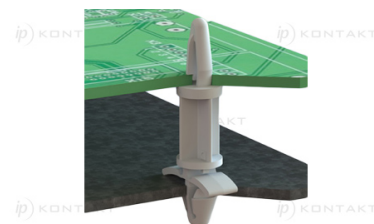


## FP-12586 -

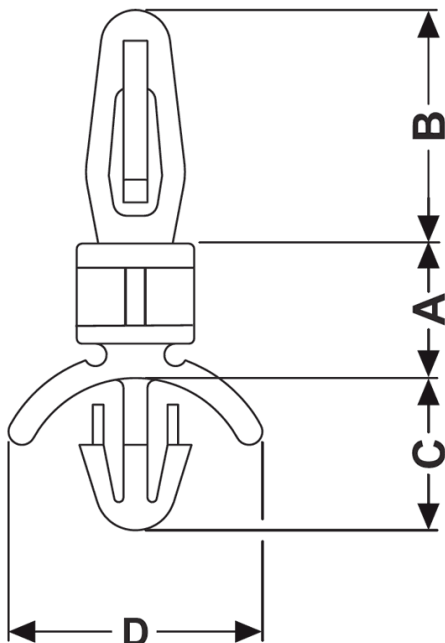

### Details:

- **Material:** PA 6.6
- **Flammability:** UL94 V-2
- **Colour:** natural
- Working temperature: -35°C to 85°C
- Standard pack: 1000 pcs

| Symbol    | Height<br>A | B    | C    | D    | Top panel<br>thickness<br>range | Top<br>mounting<br>hole dia. | Bottom panel<br>thickness<br>range | Mounting hole<br>diameter<br>range | Material | Flammability | Color   |
|-----------|-------------|------|------|------|---------------------------------|------------------------------|------------------------------------|------------------------------------|----------|--------------|---------|
|           | [mm]        | [mm] | [mm] | [mm] | [mm]                            | [mm]                         | [mm]                               | [mm]                               |          |              |         |
| 12586AA00 | 3.2         | 8.7  | 5.7  | 9.5  | 1.6 -1.7                        | 3.2                          | 0.8 - 2.0                          | 3.0 - 3.2                          | PA 66    | UL94 V-2     | natural |