





**FP-14898 - Soft grommets with membrane**

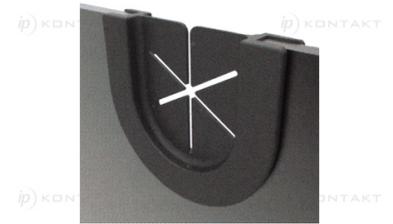

**Otwór montażowy**  
*Mounting hole*



**Details:**

- **Material: PA 6.6**
- **Color: black, white**
- Flammability: UL94 V-2
- Working temperature: -35°C ~ +85°C
- MOQ: 10000 pcs

Symbol	A	B	C	D	E	Panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
14898AA01	22.5	16.3	4	19.7	16.6	2	PA 66	UL94 V-2	black