


## FP-5660 - Threaded spacer F-F

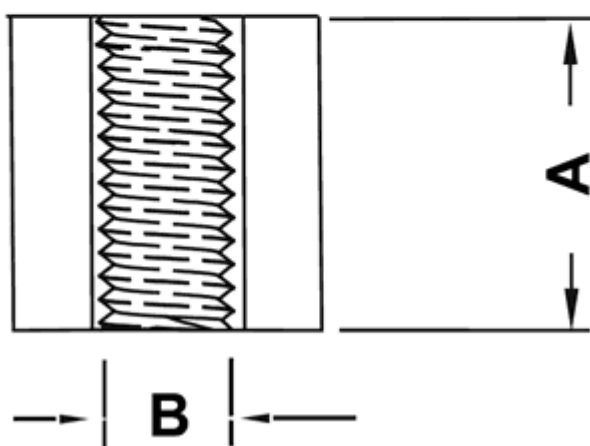

### Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C do +85°C
- M3 through hole up to 12.0 mm length. Higher lengths have 6 mm thread minimum depth on each side
- M4 through hole up to 12.7 mm length. Higher lengths have 6 mm thread minimum depth on each side

| Symbol   | Height<br>A | Int. thread<br>B | Int. thread length | Wrench size<br>C | Material | Color   | Flammability | Standard pack |
|----------|-------------|------------------|--------------------|------------------|----------|---------|--------------|---------------|
|          | [mm]        |                  | [mm]               | [mm]             |          |         |              | [szt./pcs]    |
| 5660AA00 | 4           | M3x0.5           | 4                  | 5.5              | PA 66    | natural | UL94 V-2     | 1000          |