


FP-5660 - Threaded spacer F-F

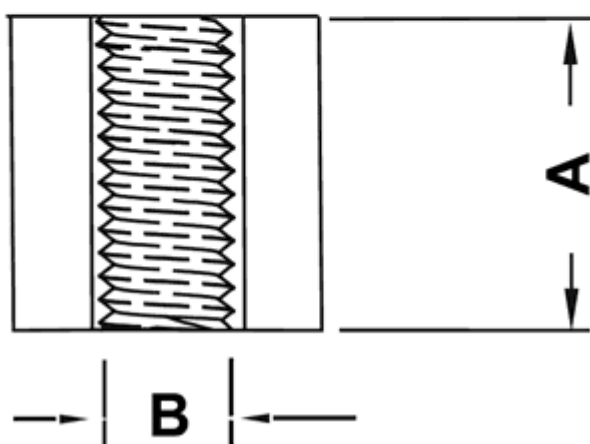

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C do +85°C
- M3 through hole up to 12.0 mm length. Higher lengths have 6 mm thread minimum depth on each side
- M4 through hole up to 12.7 mm length. Higher lengths have 6 mm thread minimum depth on each side

Symbol	Height A	Int. thread B	Int. thread length	Wrench size C	Material	Color	Flammability	Standard pack
	[mm]		[mm]	[mm]				[szt./pcs]
5668AA00	10.5	M3x0.5	10.5	5.5	PA 66	natural	UL94 V-2	1000