


## FP-6339 - PCB spacers

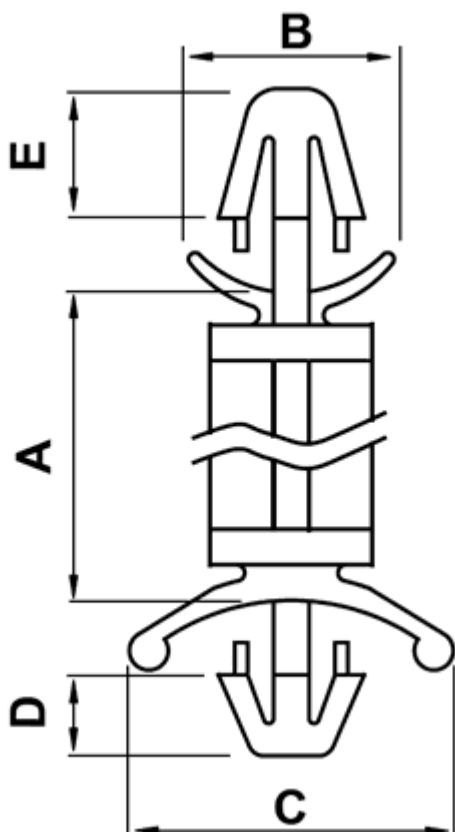

### Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- UL94V0 available on special order
- Working temperature: -35°C up to +85°C

| Symbol   | Height<br>A | B    | C    | D    | E    | Top<br>mounting<br>hole dia. | Top<br>panel<br>thickness | Bottom<br>mounting<br>hole dia. | Bottom<br>panel<br>thickness<br>range | Standard<br>pack | Material | Flammability | Color   |
|----------|-------------|------|------|------|------|------------------------------|---------------------------|---------------------------------|---------------------------------------|------------------|----------|--------------|---------|
|          | [mm]        | [mm] | [mm] | [mm] | [mm] | [mm]                         | [mm]                      | [mm]                            | [mm]                                  | [szt./pcs]       |          |              |         |
| 6349AA00 | 16          | 6.4  | 10   | 2.5  | 4    | 3.5                          | 1.6                       | 3.5                             | 0.8 - 2.0                             | 1000             | PA 66    | UL94 V-2     | natural |