


**FP-8820 - Brass PG thread cable glands**



Uszczelka O-Ring montowana od rozmiaru PG36  
 O-Ring pre-assembled from PG 36

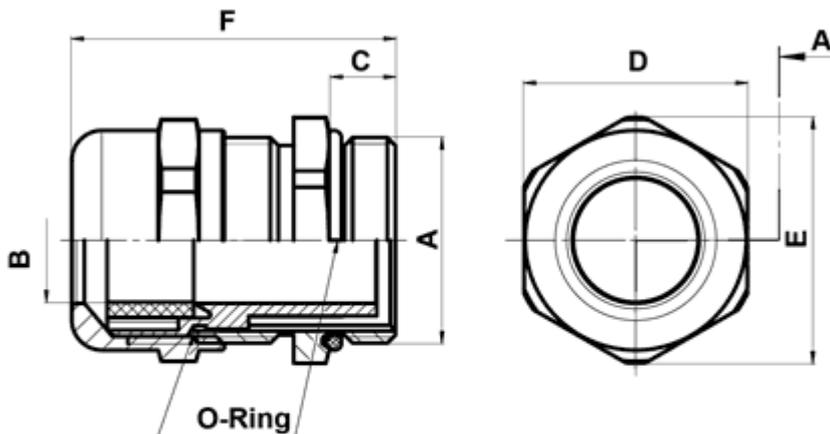

Details:

- **Material: Nickel plated brass**
- **Lamellar insert: PA 6 V-2**
- **Sealing ring: Polychloroprene nitrile**
- Working temperature: -20°C up to +100°C
- Protection grade: IP68
- PG as per DIN 40430

Symbol	PG thread	Cable diameter range ØB	C	D	E	F	Material	Standard pack
		[mm]	[mm]	[mm]	[mm]	[szt./pcs]		
8906MA92	PG13.5	6.0 - 12.0	6.5	22	22	31.5	brass, nickel plated	50