


FP-8820 - Brass PG thread cable glands



O-Ring pre-assembled from PG 36

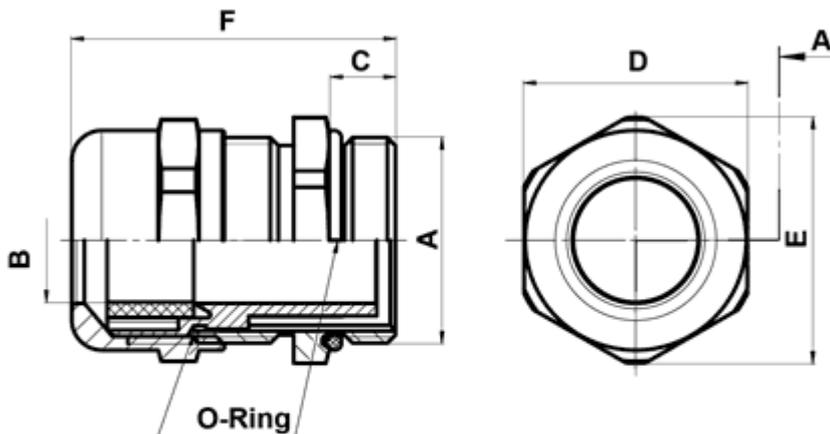

Details:

- **Material: Nickel plated brass**
- **Lamellar insert: PA 6 V-2**
- **Sealing ring: Polychloroprene nitrile**
- Working temperature: -20°C up to +100°C
- Protection grade: IP68
- PG as per DIN 40430

Symbol	PG thread	Cable diameter range	C	D	E	F	Material	Standard pack
		ØB						[szt./pcs]
		[mm]	[mm]	[mm]	[mm]			[mm]
8912MA92	PG48	34.0 - 44.0	10	64	64	52	brass, nickel plated	5