


CTS - Standard Cable Tie

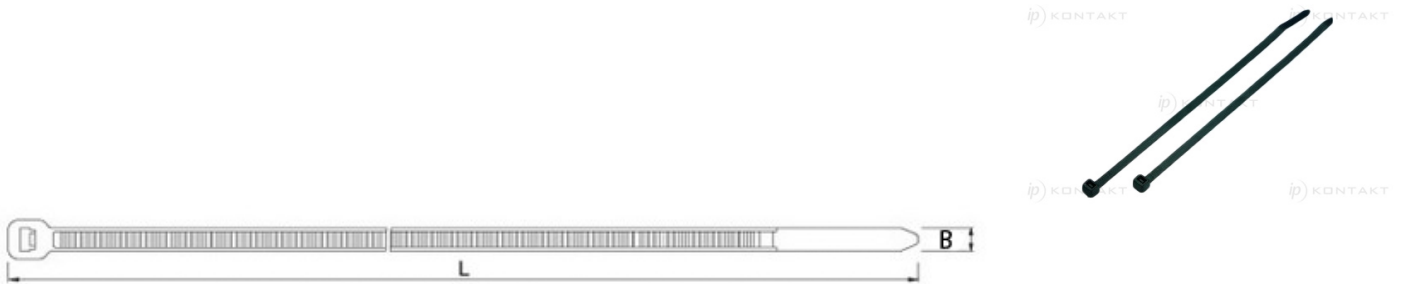

Details:

- **Polyamid 6.6, UL94 V-2 (V-0 on special order)**
- **Color: natural**
- Other colors available on special order
- Working temperature: -40°C do +85°C
- Conforms: E 75050 (S) Spec.: UL appr.; Mil.Spec. 23190D
- Safe and ease assembly
- Standard pack: 100 pcs

| Symbol | Length L | Width B | Max. cable bundle diameter [mm] | Breaking force | Material | Flammability | Color |
|-----------|-------------|------------|------------------------------------|----------------|----------|--------------|---------|
| | [mm] | [mm] | | [daN] | | | |
| CTS-20025 | 200 | 2.5 | 53 | 8.1 | PA 66 | UL94 V-2 | natural |