


## CTS-OUV - Snap-in Cable Tie, UV Resistant

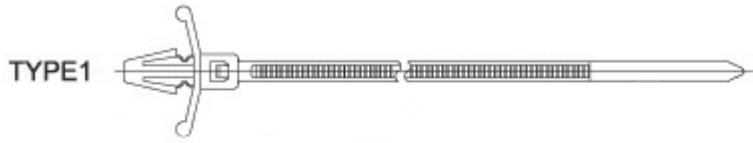

**Details:**

- **Poliamid 6.6, UL 94 V-2 (V-0 on special order)**
- **Color:** black
- Hole mounting
- UV resistant
- Working temperature: -35°C do +85°C
- Complies with: E 75050 (S) Spec.: UL appr.; Mil.Spec. 23190D
- Standard pack: 100 pcs

| Symbol             | Length | Width | Max. cable bundle diameter | Breaking force | Mounting hole diameter | Handle width | Type | Material | Flammability | Color |
|--------------------|--------|-------|----------------------------|----------------|------------------------|--------------|------|----------|--------------|-------|
|                    | [mm]   | [mm]  | [mm]                       | [daN]          | [mm]                   | [mm]         |      |          |              |       |
| CTS-O-13048-PMT-UV | 132    | 4.8   | 25                         | 22.2           | 6.4                    | 3.2          | 1    | PA 66    | UL94 V-2     | black |