


## CTS-R - Releasable Cable Tie

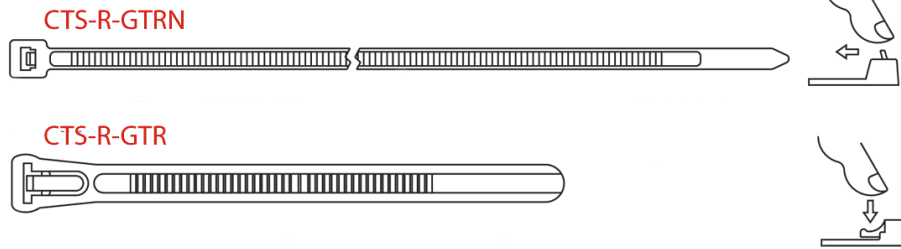

Details:

- **Poliamid 6.6, UL94 V-2 (V-0 on demand)**
- **Color:** natural, others on special order
- Releasable cable ties
- Working temperature: -35°C do +85°C
- Complies with: E 75050 (S) Spec.: UL appr.; Mil.Spec. 23190D
- Standard pack: 100 pcs

| Symbol            | Length | Width | Max. cable bundle diameter | Breaking force | Material | Flammability | Color   |
|-------------------|--------|-------|----------------------------|----------------|----------|--------------|---------|
|                   | [mm]   | [mm]  | [mm]                       | [daN]          |          |              |         |
| CTS-R-GTRN-200-HD | 200    | 7.6   | 50                         | 22.2           | PA 66    | UL94 V-2     | natural |