


## D-HB-2 - Brass hexagon spacer with nickel plating

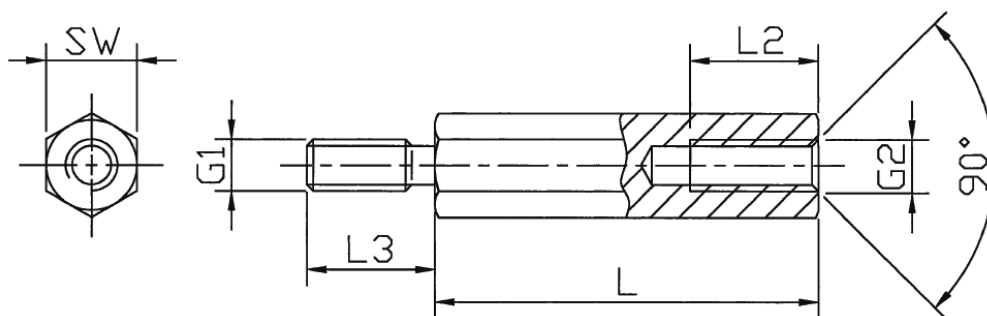

### Details:

- **Material: brass acc. to DIN 17660: Cu Zn 39 Pb 3**
- **Min. tensile strength: 430 N/mm<sup>2</sup>**
- **Surface finish acc. to: DIN 267: nickel plated (G 3 E)**
- **Tolerance for length dimension: ±0.1mm**
- **Also available w/o undercut**
- **RoHS compliant**
- **Standard pack: 100 pcs.**

| Symbol          | Ext. thread<br>G1 | Int. thread<br>G2 | Wrench size<br>SW | Height<br>L | Int. thread length<br>L2 | Ext. thread length<br>L3 | Material             |
|-----------------|-------------------|-------------------|-------------------|-------------|--------------------------|--------------------------|----------------------|
|                 |                   |                   | [mm]              | [mm]        | [mm]                     | [mm]                     |                      |
| D-HB-2-M6-10-12 | M6                | M6                | 10                | 12          | 7                        | 10                       | brass, nickel plated |