


**D-HB-3 - Brass, nickel plated hexagon spacers**

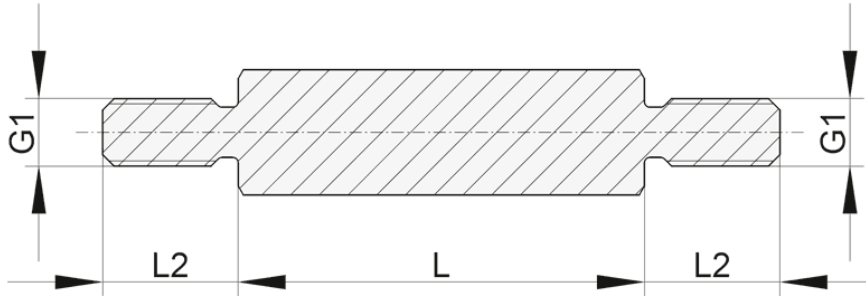

**Details:**

- **Material: brass acc. to DIN 17660: Cu Zn 39 Pb 3**
- **Min. tensile strength: 430 N/mm<sup>2</sup>**
- **Surface finish acc. to: DIN 267: nickel plated (G 3 E)**
- **Tolerance for length dimension: ±0.1mm**
- **Also available w/o undercut**
- **RoHS compliant**
- **Standard pack: 100 pcs.**

| Symbol           | Ext. thread<br>G1 | Wrench size<br>SW | Length<br>L | Ext. thread length<br>L2 | Material             |
|------------------|-------------------|-------------------|-------------|--------------------------|----------------------|
|                  |                   | [mm]              | [mm]        | [mm]                     |                      |
| D-HB-3-M2.5-5-55 | M2.5              | 5                 | 55          | 6                        | brass, nickel plated |