


## D-HM-2 - Steel hexagon spacer zinc plated

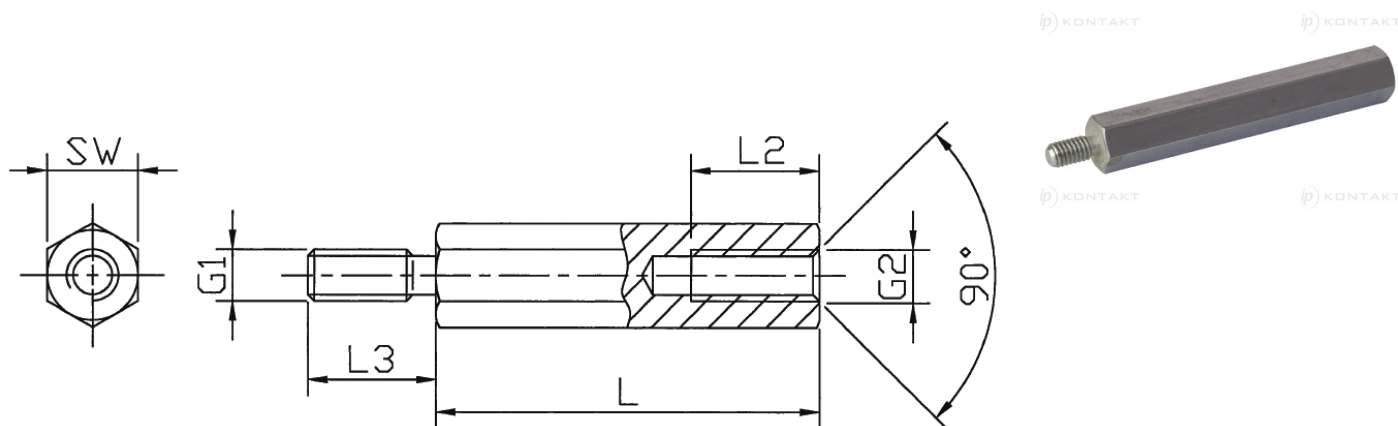

### Details:

- Steel, zinc plated, Complies **DIN 176: 11 SMn Pb30**
- Minimum tensile strength **500 N/mm²**
- Surface finish according to **DIN 267: galvanised (A3 F)**
- **Length tolerance  $\pm 0.1\text{mm}$  (DIN 2768-m applies to SW13)**
- **Other lengths also available**
- **Standard pack: 100 pcs**

| Symbol           | Ext. thread<br>G1 | Int. thread<br>G2 | Wrench size<br>SW | Height<br>L | Int. thread length<br>L2 | Ext. thread length<br>L3 | Material           |
|------------------|-------------------|-------------------|-------------------|-------------|--------------------------|--------------------------|--------------------|
|                  |                   |                   | [mm]              | [mm]        | [mm]                     | [mm]                     |                    |
| D-HM-2-M3-5.5-40 | M3                | M3                | 5.5               | 40          | 10                       | 6                        | steel, zinc plated |