


## D-HM-3 - Zinc-plated steel hexagonal spacers

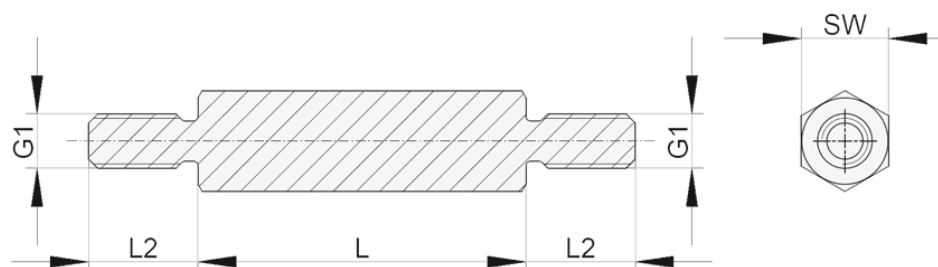

### Details:

- Steel, zinc plated, Complies **DIN 176: 11 SMn Pb30**
- Minimum tensile strength **500 N/mm<sup>2</sup>**
- Surface finish according to **DIN 267: galvanised (A3 F)**
- **Length tolerance  $\pm 0.1\text{mm}$  (DIN 2768-m applies to SW13)**
- **Other lengths also available**
- **Standard pack: 100 pcs**

| Symbol         | Ext. thread<br>G1 | Wrench size<br>SW | Height<br>L | Ext. thread length<br>L2 | Material           |
|----------------|-------------------|-------------------|-------------|--------------------------|--------------------|
|                |                   | [mm]              | [mm]        | [mm]                     |                    |
| D-HM-3-M3-6-70 | M3                | 6                 | 70          | 6                        | steel, zinc-plated |