
**IP Kontakt**
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

# D-HTSP-3 - Polyamid hexagonal spacer bolt with brass thread



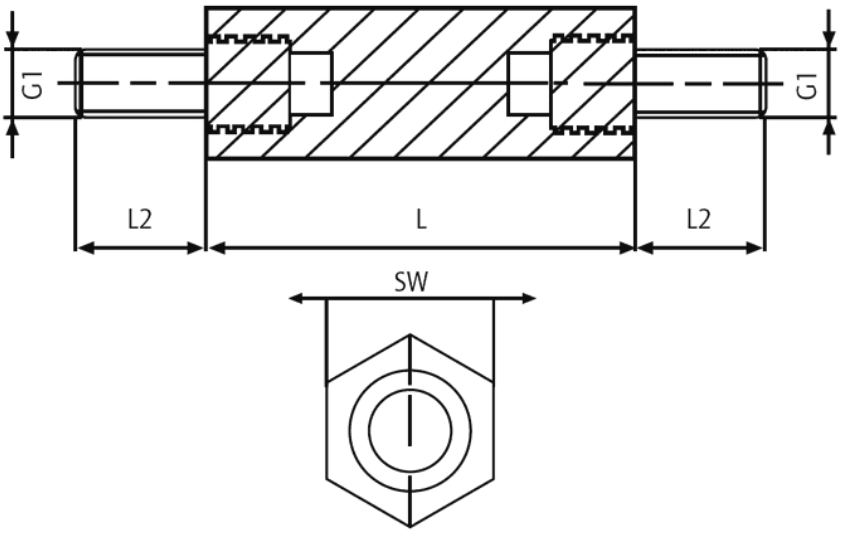


Details:

- **Body material: Polyamide 6.6 natural**
- **Thread inserts: bare brass**
- **Temperature resistance: up to 110°C**
- **Flammability: UL94 V-2**
- **Contact resistance: $10^{12}$ Ohm/cm**
- **Dielectric strength: 50kV/mm**
- **Tolerance for length dimensions: ± 0.2 mm**

| Symbol | Ext. thread G1 | Wrench size SW | Ext. thread length L2 | Height L | Max. torque | Pull out force | Material |
|---|---|---|---|---|---|---|---|
| | | [mm] | [mm] | [mm] | [Nm] | [N] | |
| D-HTSP-3-M6-13-37 | M6 | 13 | 12 | 37 | 12 | 1000 | PA 66, brass |

**Notice!:**The pull-out strength and torques may vary depending on application and ambient infl uences (e.g. temperature, air humidity, etc.). For critical applications please carry out trials. Producer does not assume any liability for the specified strength values.