


D-HTSP-3 - Polyamid hexagonal spacer bolt with brass thread

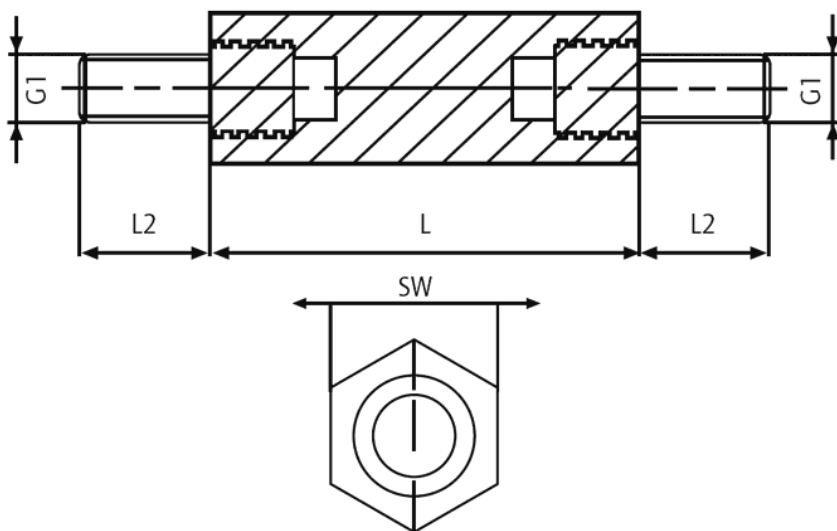

Details:

- **Body material:** Polyamide 6.6 natural
- **Thread inserts:** bare brass
- **Temperature resistance:** up to 110°C
- **Flammability:** UL94 V-2
- **Contact resistance:** 10^{12} Ohm/cm
- **Dielectric strength:** 50kV/mm
- **Tolerance for length dimensions:** ± 0.2 mm

Symbol	Ext. thread G1	Wrench size SW	Ext. thread length L2	Height L	Max. torque	Pull out force	Material
		[mm]	[mm]	[mm]	[Nm]	[N]	
D-HTSP-3-M6-13-95	M6	13	12	95	12	1000	PA 66, brass

Notice! The pull-out strength and torques may vary depending on application and ambient influences (e.g. temperature, air humidity, etc.). For critical applications please carry out trials. Producer does not assume any liability for the specified strength values.