


### D-MS-1 - Polyamid hexagonal spacer bolt with brass thread

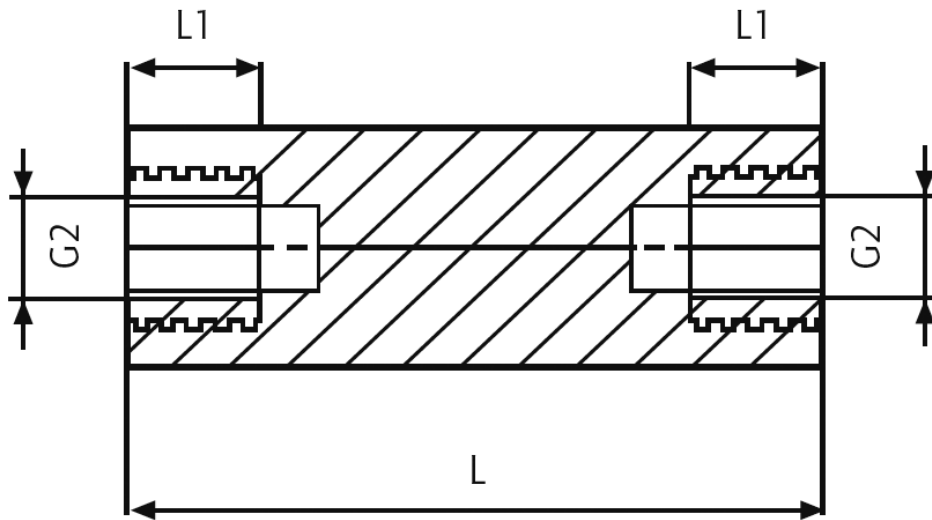

**Details:**

- **Body material: Polyamide 6.6 white**
- **Thread inserts: brass (Nickel-plated on special order)**
- Temperature resistance: up to 110°C
- Fire class: UL 94-V2
- Contact resistance:  $10^{12}$  Ohm/cm
- Dielectric strength: 50kV/mm
- Tolerance for length dimensions:  $\pm 0.1$  mm

| Symbol           | Int. thread<br>G1 | Wrench size | Length<br>L | Int. thread length<br>L1 | Material     |
|------------------|-------------------|-------------|-------------|--------------------------|--------------|
|                  |                   | [mm]        | [mm]        | [mm]                     |              |
| D-MS-1-M2.5-6-15 | M2.5              | 6           | 15          | 6                        | PA 66, brass |