


D-MS-1 - Polyamid hexagonal spacer bolt with brass thread

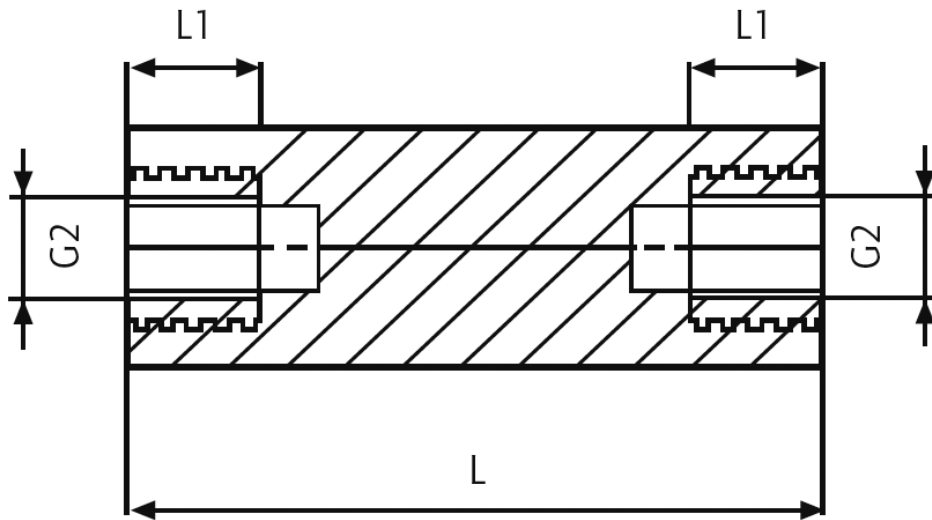

Details:

- **Body material: Polyamide 6.6 white**
- **Thread inserts: brass (Nickel-plated on special order)**
- Temperature resistance: up to 110°C
- Fire class: UL 94-V2
- Contact resistance: 10^{12} Ohm/cm
- Dielectric strength: 50kV/mm
- Tolerance for length dimensions: ± 0.1 mm

| Symbol | Int. thread G1 | Wrench size | Length L | Int. thread length L1 | Material |
|------------------|-------------------|-------------|-------------|--------------------------|--------------|
| | | [mm] | [mm] | [mm] | |
| D-MS-1-M2.5-6-47 | M2.5 | 6 | 47 | 6 | PA 66, brass |