


**D-MS-2 - Polyamid hexagonal spacer bolt with brass thread**

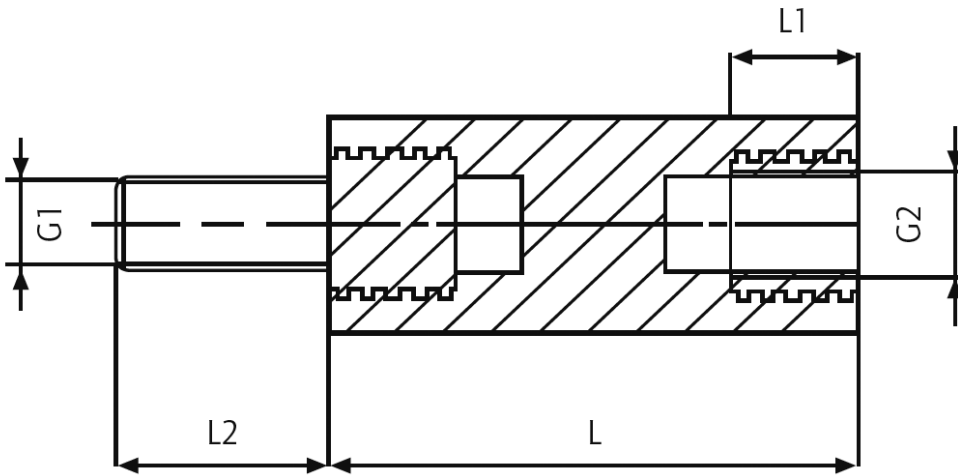

**Details:**

- **Body material: Polyamid 6.6**
- **Color: white**
- **Thread inserts: brass (Nickel-plated on special order)**
- Temperature resistance: up to 110°C
- Fire class: UL 94-V2
- Contact resistance:  $10^{12} \Omega/\text{cm}$
- Dielectric strength: 50kV/mm
- Tolerance for length dimensions:  $\pm 0.1 \text{ mm}$
- On special order: material: Polyamid 6.6 fiber glass reinforced 25%, brown; UL 94-V0; UL File No. E116324

Symbol	Int. thread G2	Ext. thread G1	Wrench size	Length L	Int. thread length L1	Ext. thread length L2	Material
			[mm]	[mm]	[mm]	[mm]	
D-MS-2-M2.5-6-32	M2.5	M2.5	6	32	6	6	PA 66, brass