


## D-MS-2 - Polyamid hexagonal spacer bolt with brass thread

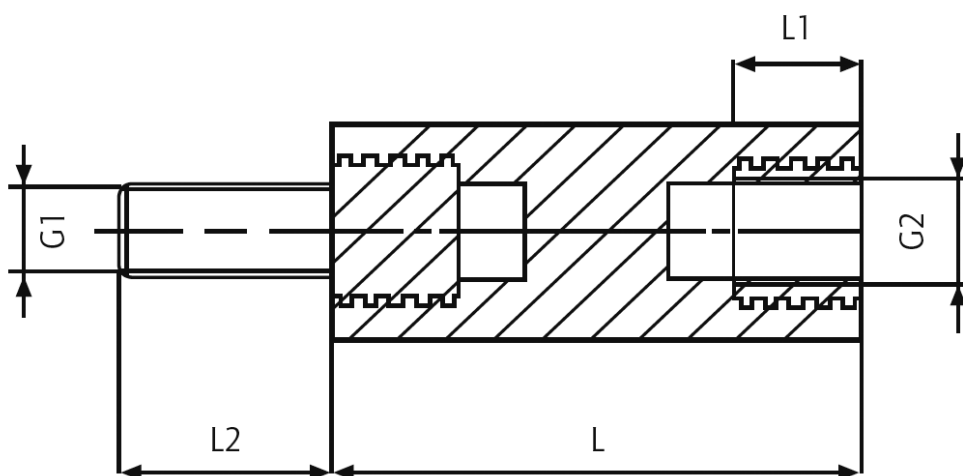

### Details:

- **Body material: Polyamid 6.6**
- **Color: white**
- **Thread inserts: brass (Nickel-plated on special order)**
- Temperature resistance: up to 110°C
- Fire class: UL 94-V2
- Contact resistance:  $10^{12} \Omega/\text{cm}$
- Dielectric strength: 50kV/mm
- Tolerance for length dimensions:  $\pm 0.1 \text{ mm}$
- On special order: material: Polyamid 6.6 fiber glass reinforced 25%, brown; UL 94-V0; UL File No. E116324

| Symbol           | Int. thread<br>G2 | Ext. thread<br>G1 | Wrench size | Height<br>L | Int. thread length<br>L1 | Ext. thread length<br>L2 | Material     |
|------------------|-------------------|-------------------|-------------|-------------|--------------------------|--------------------------|--------------|
|                  |                   |                   | [mm]        | [mm]        | [mm]                     | [mm]                     |              |
| D-MS-2-M2.5-6-37 | M2.5              | M2.5              | 6           | 37          | 6                        | 6                        | PA 66, brass |