
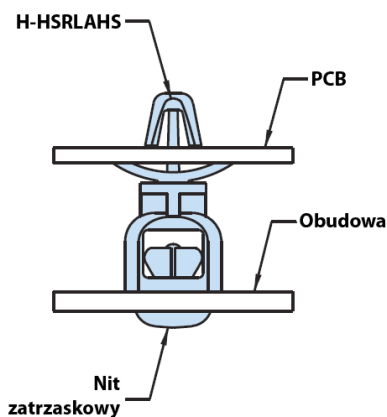


## H-HSRLAHS - Nylon PCB Support - Rivet mount

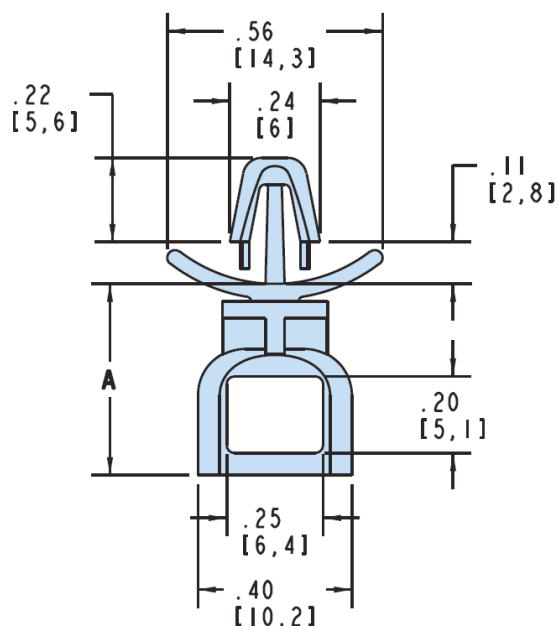

### Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural
- **Temperature Range:** -40°C to 85°C
- **Metric dimensions in square brackets ±0.1 mm**
- Recognized under the Component Program of Underwriters' Laboratories File F197

| Symbol  | Height A | Top panel thickness | Top mounting hole dia. | Material | Flammability | Color   |
|---------|----------|---------------------|------------------------|----------|--------------|---------|
|         | [mm]     | [mm]                | [mm]                   |          |              |         |
| H-10881 | 19.1     | 1.6                 | 4.8                    | PA 66    | UL94 V-2     | natural |

### Example rivets:

| Part No. | Panel thickness |
|----------|-----------------|
|          | [mm]            |
| H-9058   | 0.7 - 1.6       |
| H-9060   | 1.6 - 2.7       |
| H-9062   | 2.7 - 3.7       |
| H-9064   | 3.7 - 4.7       |
| H-9066   | 4.7 - 5.7       |
| H-9068   | 5.7 - 6.7       |
| H-9318   | 7.2 - 8.7       |