



## H-SLP -

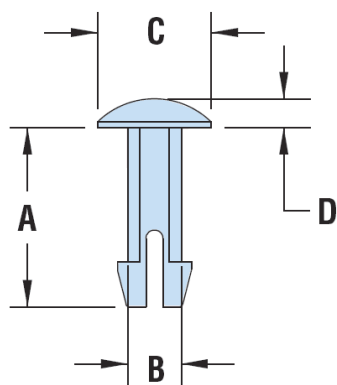

**Typ 1**  
Type 1

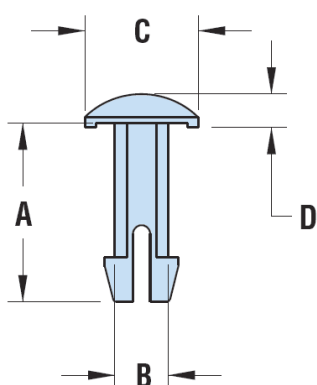

**Typ 2**  
Type 2



### Details:

- **Material:** Nylon 6/6
- **Klasa palności:** UL94 V-2
- Zakres temperatur: -40°C do 85°C
- Used to fix connectors to the printed circuit board prior to wave soldering.

| Symbol  | Mounting hole diameter | Panel thickness | A    | B    | Head diameter C | Head height D | Type | Material | Flammability | Color   |
|---------|------------------------|-----------------|------|------|-----------------|---------------|------|----------|--------------|---------|
|         | [mm]                   | [mm]            | [mm] | [mm] | [mm]            | [mm]          |      |          |              |         |
| H-12052 | 2.5                    | 5.6             | 7.6  | 2.4  | 5.1             | 1.5           | 2    | PA 66    | UL94 V-2     | natural |