



H-SLP -

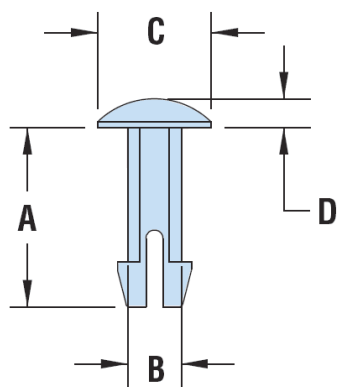

Typ 1
Type 1

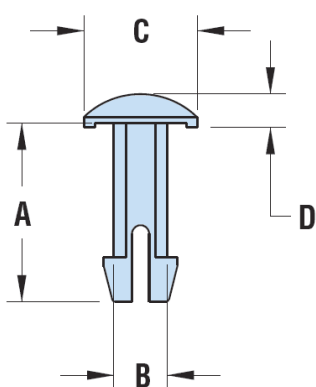

Typ 2
Type 2



Details:

- **Material:** Nylon 6/6
- **Klasa palności:** UL94 V-2
- Zakres temperatur: -40°C do 85°C
- Used to fix connectors to the printed circuit board prior to wave soldering.

Symbol	Mounting hole diameter	Panel thickness	A	B	Head diameter C	Head height D	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]				
H-12058	2.5	10.5	12.4	2.4	5.1	1.5	2	PA 66	UL94 V-2	natural