



## H-EXR - Expansion rivets

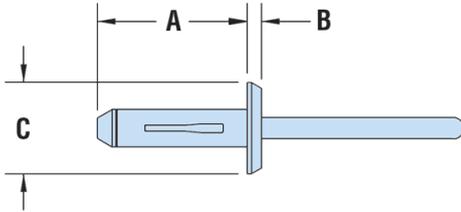

**Typ 1**  
Type 1

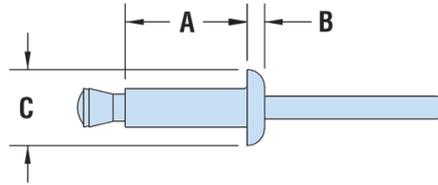

**Typ 2**  
Type 2



### Details:

- **Type 1:**
  - **Body material: Nylon 6/6**
  - **Pin material: Acetal (POM)**
  - Body flammability: UL94 V-2
  - Pin flammability: UL94 HB
- **Type 2:**
  - **Body material: Nylon 6/6**
  - **Pin material: polycarbonate**
  - Body and pin flammability: UL94 V-2
- Colour: black
- Temperature Range: -40°C to 120°C
- One-piece, all plastic expansion rivet.
- Designed to securely fasten a wide variety of materials in a range of applications.
- Inserts quickly from either side of assembly.
- Use with standard rivet setting tool - pull the pin through the body and panels are drawn together.
- Pin breaks off even with head and leaves an attractive, finished appearance.
- Effective for soft materials such as rubber, padded fabrics, etc.

Symbol	Mounting hole diameter	Panel thickness range	A	Head height B	Head diameter C	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]				
H-12231	5	3.0 - 4.0	16.5	1.8	8.9	1	PA 66 + POM	UL94 V-2	black