



H-EXR - Expansion rivets

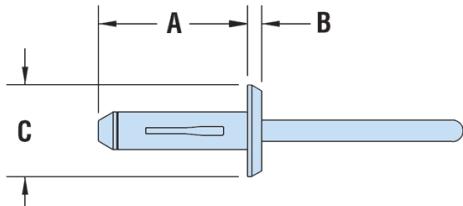

Typ 1
Type 1

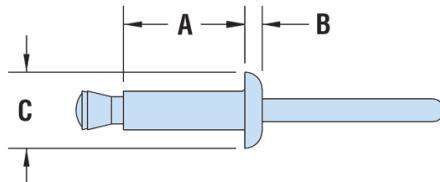

Typ 2
Type 2



ip KONTAKT

Details:

- **Type 1:**
 - **Body material:** Nylon 6/6
 - **Pin material:** Acetal (POM)
 - Body flammability: UL94 V-2
 - Pin flammability: UL94 HB
- **Type 2:**
 - **Body material:** Nylon 6/6
 - **Pin material:** polycarbonate
 - Body and pin flammability: UL94 V-2
- Colour: black
- Temperature Range: -40°C to 120°C
- One-piece, all plastic expansion rivet.
- Designed to securely fasten a wide variety of materials in a range of applications.
- Inserts quickly from either side of assembly.
- Use with standard rivet setting tool - pull the pin through the body and panels are drawn together.
- Pin breaks off even with head and leaves an attractive, finished appearance.
- Effective for soft materials such as rubber, padded fabrics, etc.

Symbol	Mounting hole diameter	Panel thickness range	A	Head height B	Head diameter C	Typ/Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]				
H-12232	5	3.0 - 6.0	20	1.8	12	1	PA 66 + POM	UL94 V-2	black